

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: [0782171011](#)
Status: **Active**
Overview: [Impact Backplane Connector and Cable Assembly System](#)
Description: Impact 6 Pair, Right-Angle Power Header, Press-Fit, Blade A1 & A2; B1 & B2 and C1 & C2 Length 6.90mm, LCP, Glass Filled, UL94-V0, Black, Tray Packaging, Lead-Free

Documents:

3D Model	Application Specification AS-76060-9999-001 (PDF)
Drawing (PDF)	Packaging Specification PK-78217-001-001 (PDF)
3D Model (PDF)	Symbol Footprint Data SYM-78217-1011 (PDF)
Product Specification PS-78213-001-001 (PDF)	RoHS Certificate of Compliance (PDF)
Application Specification AS-76060-9997-001 (PDF)	

Agency Certification


UL E29179

General

Product Family	Backplane Connectors
Series	78217
Application	Conventional, Coplanar
Application Tooling Documents	TM-622018799
Component Type	Power Header
Overview	Impact Backplane Connector and Cable Assembly System
Product Name	Impact
UPC	884982552746

Physical

Circuits (Loaded)	6
Circuits (maximum)	6
Color - Resin	Black
Durability (mating cycles max)	200
First Mate / Last Break	No
Flammability	94V-0
Guide to Mating Part	No
Keying to Mating Part	None
Material - Metal	Copper Alloy
Material - Plating Mating	Gold
Material - Plating Termination	Tin
Material - Resin	High Temperature Thermoplastic
Net Weight	15.168/g
Number of Columns	N/A
Number of Pairs	6
Number of Rows	3
Orientation	Right Angle
PC Tail Length	2.50mm
PCB Locator	No
PCB Retention	None
PCB Thickness - Recommended	1.60mm
Packaging Type	Tray
Pitch - Mating Interface	5.20mm
Pitch - Termination Interface	2.00mm, 3.20mm
Plating min - Mating	0.762µm
Plating min - Termination	2.540µm
Polarized to PCB	No
Stackable	No
Surface Mount Compatible (SMC)	No

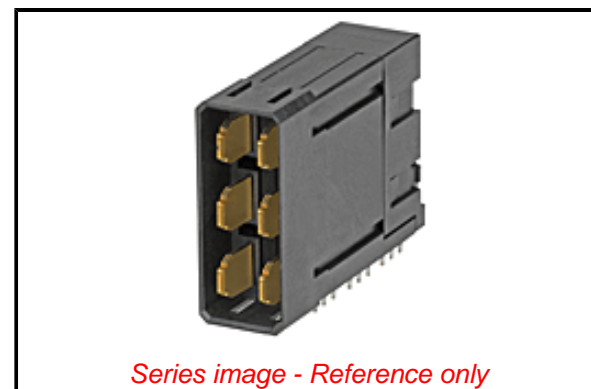

Series image - Reference only

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
D(2020)9139-DC (19
Jan 2021)

Halogen-Free

Status

Low-Halogen

For more information, please visit [Contact US](#)

China ROHS

ELV

RoHS Phthalates

China RoHS

Green Image

Not Relevant

Not Contained

Search Parts in this Series

[78217](#) Series

Mates With

[78218](#) Impact Vertical Receptacle

Temperature Range - Operating -55° to +85°C
Termination Interface: Style Through Hole - Compliant Pin

Electrical

Current - Maximum per Contact 20.0A
Data Rate N/A
Shield Type N/A
Shielded No
Voltage - Maximum 250V

Solder Process Data

Lead-free Process Capability N/A

Material Info

Reference - Drawing Numbers

Application Specification AS-76060-9997-001, AS-76060-9999-001
Packaging Specification PK-78217-001-001
Product Specification PS-78213-001-001
Sales Drawing SD-78217-0000-001, SD-78217-002
Symbol/Footprint Data SYM-78217-1011

This document was generated on 05/17/2021

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION