

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION

Part Number: **0877601616**
Status: **Active**
Overview: Milli-Grid™ Connector System
Description: 2.00mm Pitch Milli-Grid™ Header, Right Angle, Through Hole, 16 Circuits, 0.38µm Gold (Au) Selective Plating, Tray, Lead-Free

Documents:

[3D Model](#) [Product Specification PS-87761-100 \(PDF\)](#)
[Drawing \(PDF\)](#) [RoHS Certificate of Compliance \(PDF\)](#)

Agency Certification


CSA LR19980
 UL E29179

General

Product Family PCB Headers
 Series 87760
 Application Board-to-Board, Signal, Wire-to-Board
 Comments Lead-Free version of 87049 series
 Overview Milli-Grid™ Connector System
 Product Name Milli-Grid™
 UPC 822348273720

Physical

Breakaway No
 Circuits (Loaded) 16
 Circuits (maximum) 16
 Color - Resin Black
 First Mate / Last Break No
 Flammability 94V-0
 Glow-Wire Compliant No
 Guide to Mating Part No
 Keying to Mating Part None
 Lock to Mating Part None
 Mated Height 4.00mm
 Material - Metal Phosphor Bronze
 Material - Plating Mating Gold
 Material - Plating Termination Tin
 Material - Resin High Temperature Thermoplastic
 Net Weight 0.641/g
 Number of Rows 2
 Orientation Right Angle
 PC Tail Length 2.60mm
 PCB Locator No
 PCB Retention None
 PCB Thickness - Recommended 1.60mm
 Packaging Type Tray
 Pitch - Mating Interface 2.00mm
 Pitch - Termination Interface 2.00mm
 Plating min - Mating 0.381µm
 Plating min - Termination 1.905µm
 Polarized to Mating Part No
 Polarized to PCB No
 Shrouded No
 Stackable Yes
 Surface Mount Compatible (SMC) Yes
 Temperature Range - Operating -55°C to +105°C

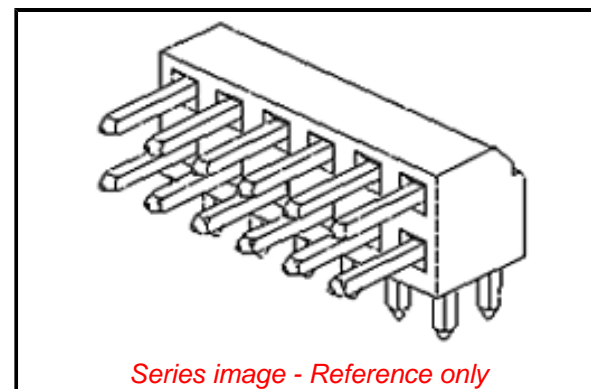

EU ELV

Not Relevant

EU RoHS

Compliant

REACH SVHC

Not Contained Per -
 ED/30/2017 (7 July
 2017)

Halogen-Free

Status

Not Low-Halogen

**Need more information on product
 environmental compliance?**

Email productcompliance@molex.com
 Please visit the [Contact Us](#) section for any
 non-product compliance questions.

China ROHS	Green Image
ELV	Not Relevant
RoHS Phthalates	Not Contained

Search Parts in this Series

87760 Series

Mates With

Milli-Grid™ Vertical Through Hole
 Receptacle 79107 , 78787 , Milli-Grid™
 Flex-to-Board Vertical Receptacle 79108
 , Milli-Grid™ Vertical Surface Mount
 Receptacle 79109 , 78788 , Milli-Grid™ Top
 Entry Surface Mount Receptacle 87381

Termination Interface: Style Through Hole

Electrical

Current - Maximum per Contact 2.0A

Voltage - Maximum 125V

Solder Process Data

Duration at Max. Process Temperature (seconds) 014

Lead-free Process Capability WAVE

Max. Cycles at Max. Process Temperature 001

Process Temperature max. C 265

Material Info

Reference - Drawing Numbers

Product Specification PS-87761-100

Sales Drawing SD-87760-109

This document was generated on 09/12/2017

PLEASE CHECK WWW.MOLEX.COM FOR LATEST PART INFORMATION