

Type APR58

Automotive Blade Fuse

Standard – Extended Voltage



www.optifuse.com (619) 593-5050

Specifications:

- Voltage: 58V DC
- Amperage: 500mA, 1A, 2A, 3A, 4A, 5A, 7.5A, 10A, 15A, 20A, 25A, 30A, 35A, 40A
- Material: Body – Fiber Glass Reinforced Plastic, UL94V0 Flame Resistant
Metal – Copper, Zinc, Silver Alloy
- Interrupt Rating: 1000A 58VDC


Standards: According to SAE J1284



Part Number	Amperage	Body Color
APR58-500MA	500mA	Dark Blue
APR58-1A	1A	Black
APR58-2A	2A	Gray
APR58-3A	3A	Violet
APR58-4A	4A	Pink
APR58-5A	5A	Tan
APR58-7.5A	7.5A	Brown
APR58-10A	10A	Red
APR58-15A	15A	Blue
APR58-20A	20A	Yellow
APR58-25A	25A	Clear
APR58-30A	30A	Green
APR58-35A	35A	Blue Green
APR58-40A	40A	Orange

Time Characteristics:		
% of Rated Current	Min Hold Time	Max Hold Time
110%	>100h	
135%	750ms	1800s
200%	150ms	5s
350%	40ms	500 ms
600%	20ms	100ms

Mechanical Dimensions: Inches [mm]

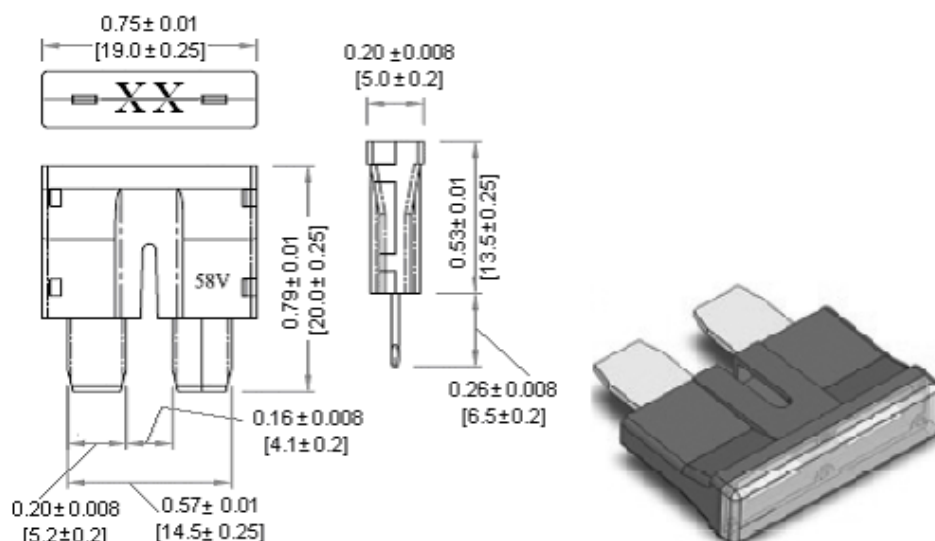

Warning:



- Operation beyond the specified maximum ratings or improper use may result in damage and possible electrical arcing and/or flame.
- Avoid contact of device with chemical solvent. Prolonged contact will damage the device performance.

Type APR58 Automotive Blade Fuse Standard – Extended Voltage



www.optifuse.com

(619) 593-5050

Time Current Curve Graph

