



**Normally closed type  
with reinforced insulation**

PhotoMOS®

**GE 1 Form B  
(AQY410EH)**

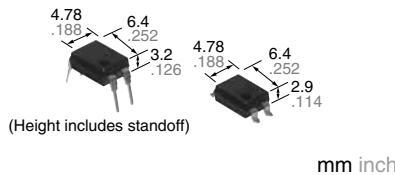

**RoHS compliant**


## FEATURES

### 1. 1 Form B output type

### 2. Low on-resistance

This has been realized thanks to the built-in MOSFET processed by our proprietary method, DSD (Double-diffused and Selective Doping) method.

Cross section of the normally-closed type of power MOS

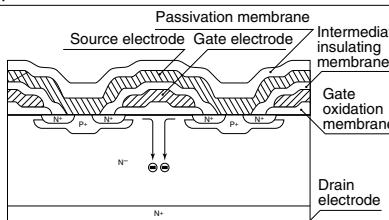

### 3. Reinforced insulation of 5,000 V

More than 0.4 mm internal insulation distance between inputs and outputs.  
 Conforms to EN41003, EN60950 (reinforced insulation).

### 4. Controls low-level analog signals

PhotoMOS feature extremely low closed-circuit offset voltage to enable control of low-level analog signals without distortion.

### 5. High sensitivity and low on-resistance

Can control max. 0.55 A load current with 5 mA input current.

Low on-resistance of Typ.1Ω (AQY412EH).

### 6. Low-level off-state leakage current

## TYPICAL APPLICATIONS

- Power supply
- Measuring equipment
- Security equipment
- Modem
- Telephone equipment
- Electricity, plant equipment
- Sensing equipment

## TYPES

Type	I/O isolation voltage	Output rating*		Package	Part No.			Packing quantity		
					Through hole terminal		Surface-mount terminal			
					Tube packing style		Tape and reel packing style			
AC/DC dual use	Reinforced 5,000 Vrms	60 V	550 mA	DIP4-pin	AQY412EH	AQY412EHA	Picked from the 1/2-pin side	1 tube contains: 100 pcs. 1 batch contains: 1,000 pcs.		
		350 V	130 mA		AQY410EH	AQY410EHA	AQY410EHAX			
		400 V	120 mA		AQY414EH	AQY414EHA	AQY414EHAX			

\*Indicate the peak AC and DC values.

Note: For space reasons, the initial letters of the part number "AQY", the surface mount terminal shape indicator "A" and the packing style indicator "X" or "Z" are not marked on the device. (Ex. the label for product number AQY412EHAX is 412EH.)

## RATING


### 1. Absolute maximum ratings (Ambient temperature: 25°C 77°F)

Item	Symbol	AQY412EH(A)	AQY410EH(A)	AQY414EH(A)	Remarks
Input	LED forward current	I <sub>F</sub>	50 mA		f = 100 Hz, Duty factor = 0.1%
	LED reverse voltage	V <sub>R</sub>	5 V		
	Peak forward current	I <sub>FP</sub>	1 A		
	Power dissipation	P <sub>in</sub>	75 mW		
Output	Load voltage (peak AC)	V <sub>L</sub>	60 V	350 V	Peak AC, DC 100 ms (1 shot), V <sub>L</sub> = DC
	Continuous load current	I <sub>L</sub>	0.55 A	0.13 A	
	Peak load current	I <sub>peak</sub>	1.5 A	0.4 A	
	Power dissipation	P <sub>out</sub>	500 mW		
Total power dissipation	P <sub>T</sub>		550 mW		
I/O isolation voltage	V <sub>iso</sub>		5,000 Vrms		
Ambient temperature	Operating	T <sub>opr</sub>	-40 to +85°C	-40 to +185°F	(Non-icing at low temperatures)
	Storage	T <sub>stg</sub>	-40 to +100°C	-40 to +212°F	

# GE 1 Form B (AQY41○EH)

## 2. Electrical characteristics (Ambient temperature: 25°C 77°F)

Item		Symbol	AQY412EH(A)	AQY410EH(A)	AQY414EH(A)	Condition
Input	LED operate (OFF) current	Typical	$I_{Foff}$	1.4 mA		$I_L = \text{Max.}$
		Maximum		3.0 mA		
Output	LED reverse (ON) current	Minimum	$I_{For}$	0.4 mA		$I_F = \text{Max.}$
		Typical		1.3 mA		
Transfer characteristics	LED dropout voltage	Typical	$V_F$	1.25 (1.14 V at $I_F = 5 \text{ mA}$ )		$I_F = 50 \text{ mA}$
		Maximum		1.5 V		
Transfer characteristics	On resistance	Typical	$R_{on}$	1Ω	18Ω	$I_F = 0 \text{ mA}$ $I_L = \text{Max.}$ Within 1 s
		Maximum		2.5Ω	25Ω	
Transfer characteristics	Off state leakage current	Maximum	$I_{Leak}$	10μA		$I_F = 5 \text{ mA}$ $V_L = \text{Max.}$
		Typical		3.0 ms	1.0 ms	
Transfer characteristics	Operate (OFF) time*	Maximum	$T_{off}$	10.0 ms		$I_F = 0 \text{ mA} \rightarrow 5 \text{ mA}$ $I_L = \text{Max.}$
		Typical		0.2 ms	0.3 ms	
Transfer characteristics	Reverse (ON) time*	Maximum	$T_{on}$	1.0 ms		$I_F = 5 \text{ mA} \rightarrow 0 \text{ mA}$ $I_L = \text{Max.}$
		Typical		0.8 pF		
Transfer characteristics	I/O capacitance	Maximum	$C_{iso}$	1.5 pF		$f = 1\text{MHz}$ $V_B = 0 \text{ V}$
		Minimum		1,000MΩ		
*Operate/Reverse time						

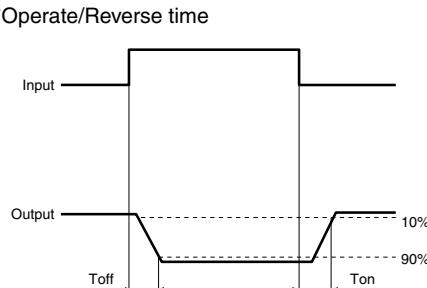

## 3. Recommended operating conditions (Ambient temperature: 25°C 77°F)

Please use under recommended operating conditions to obtain expected characteristics.

Item		Symbol	Min.	Max.	Unit
AQY412EH(A)	LED current		$I_F$	5	30
	Load voltage (Peak AC)	$V_L$	—	48	V
AQY410EH(A)	Continuous load current		$I_L$	0.55	A
	Load voltage (Peak AC)	$V_L$	—	280	V
AQY414EH(A)	Continuous load current		$I_L$	0.13	A
	Load voltage (Peak AC)	$V_L$	—	320	V
	Continuous load current		$I_L$	0.12	A


■ These products are not designed for automotive use.

If you are considering to use these products for automotive applications, please contact your local Panasonic Corporation technical representative.

## REFERENCE DATA


### 1-(1). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

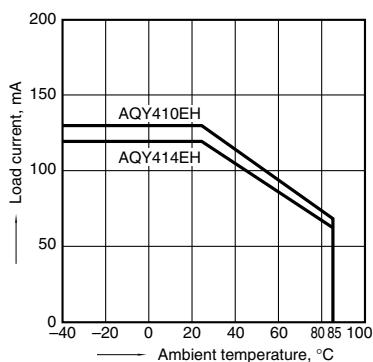


### 1-(2). Load current vs. ambient temperature characteristics

Allowable ambient temperature: -40 to +85°C  
-40 to +185°F

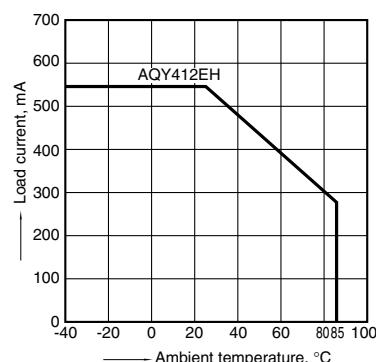


### 2. On resistance vs. ambient temperature characteristics

Measured portion: between terminals 3 and 4;  
LED current: 0 mA; Load voltage: Max.(DC);  
Continuous load current: Max. (DC)

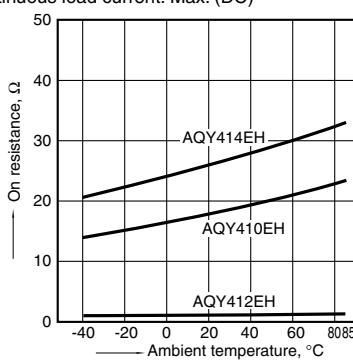


**3. Operate (OFF) time vs. ambient temperature characteristics**

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

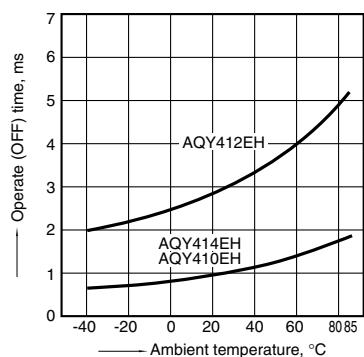


**4. Reverse (ON) time vs. ambient temperature characteristics**

LED current: 5 mA; Load voltage: Max. (DC); Continuous load current: Max. (DC)

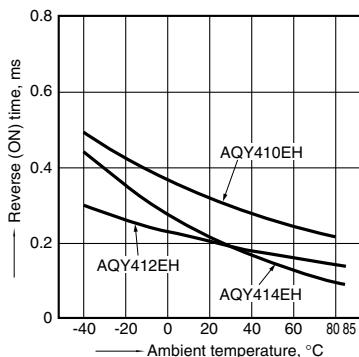


**5. LED operate (OFF) current vs. ambient temperature characteristics**

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

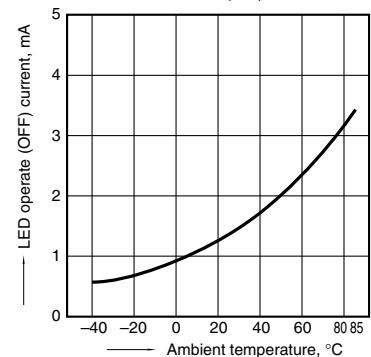


**6. LED reverse (ON) current vs. ambient temperature characteristics**

Sample: All types; Load voltage: Max. (DC); Continuous load current: Max. (DC)

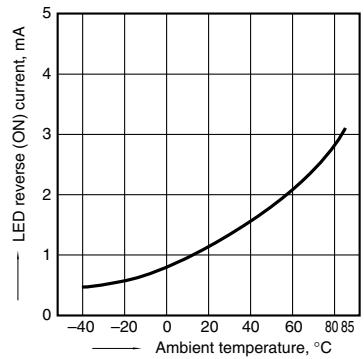


**7. LED dropout voltage vs. ambient temperature characteristics**

LED current: 5 to 50 mA

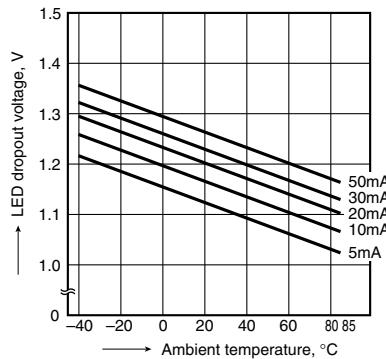


**8-(1). Current vs. voltage characteristics of output at MOS portion**

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F




**8-(2). Current vs. voltage characteristics of output at MOS portion**

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F




**9. Off state leakage current vs. load voltage characteristics**

Measured portion: between terminals 3 and 4; Ambient temperature: 25°C 77°F

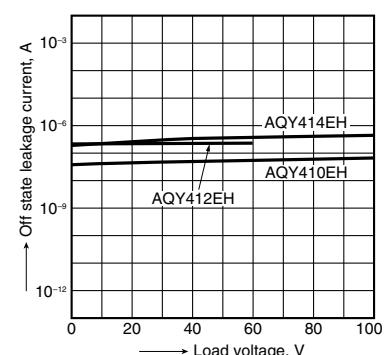


**10. Operate (OFF) time vs. LED forward current characteristics**

Measured portion: between terminals 3 and 4; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

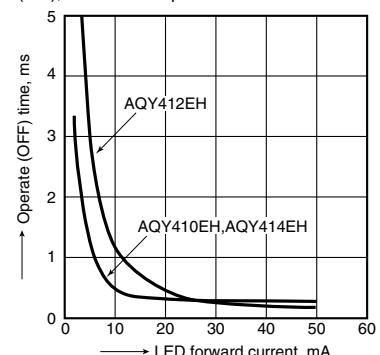


**11. Reverse (ON) time vs. LED forward current characteristics**

Measured portion: between terminals 3 and 4; Load voltage: Max. (DC); Continuous load current: Max. (DC); Ambient temperature: 25°C 77°F

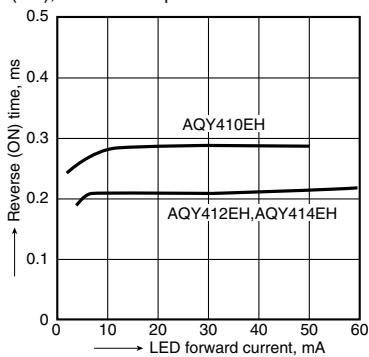

**12. Output capacitance vs. applied voltage characteristics**

Measured portion: between terminals 3 and 4; Frequency: 1 MHz; Ambient temperature: 25°C 77°F

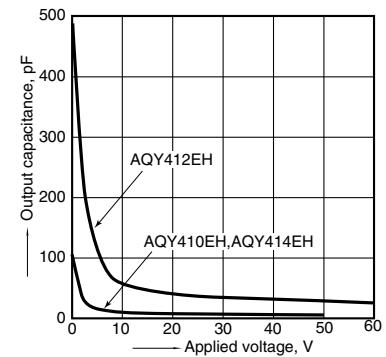

"PhotoMOS®", "PhotoMOS" and "PHOTOMOS" are registered trademarks of Panasonic Corporation.

\*Recognized in Japan, the United States, all member states of European Union and other countries.

---

Please contact .....

**Panasonic Corporation**

Electromechanical Control Business Division

■ 1006, Oaza Kadoma, Kadomashi, Osaka 571-8506, Japan  
[industrial.panasonic.com/ac/e/](http://industrial.panasonic.com/ac/e/)

**Panasonic®**

©Panasonic Corporation 2017