

MICRO SWITCH

FREERPORT ILLINOIS, U.S.A.
A DIVISION OF HONEYWELL


FED. MFG. CODE 91929

SWITCH-BASIC

CATALOG LISTING

BZ-3YQ8T

SLOT IN HEX NUT TO CLEAR ROLLER -.50 DIA X .19 WIDE SINTERED STAINLESS STEEL ROLLER

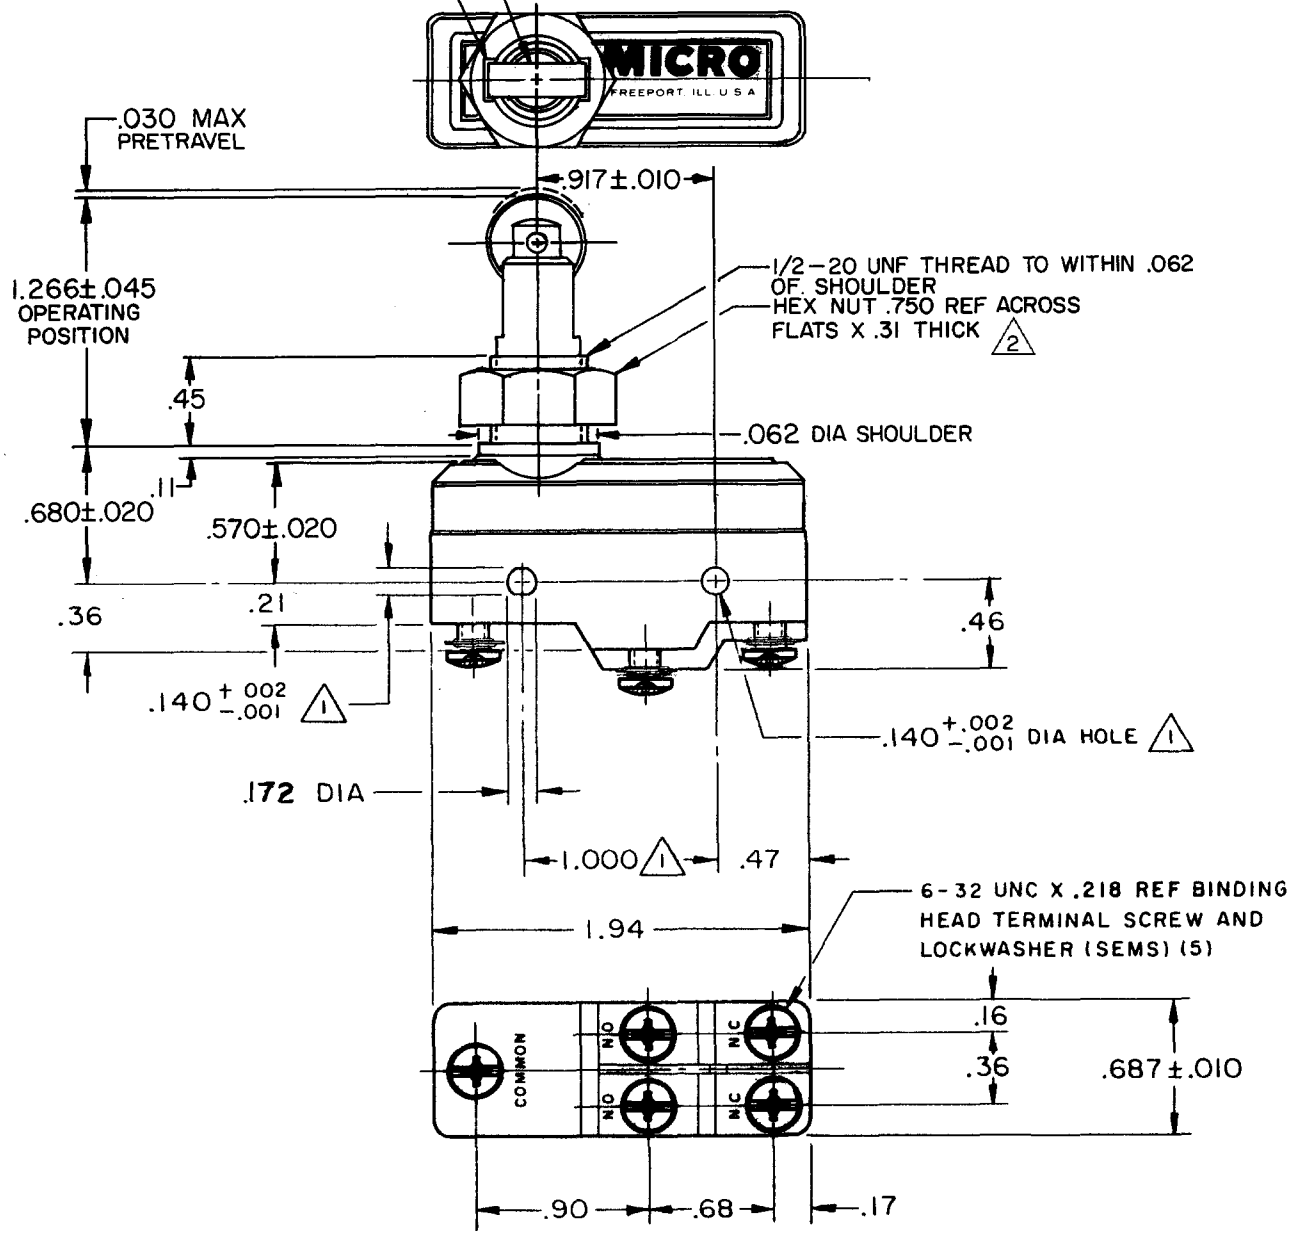

- NOTES
- ① MOUNTING HOLES WILL ACCEPT PINS OR SCREWS OF .139 MAX DIA ON 1.000 ± .002 CENTERS
 - ② HARDWARE FURNISHED UNASSEMBLED

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH. THIRD ANGLE PROJECTION

CHARACTERISTICS	
OPERATING FORCE-----	16-26 OZ
RELEASE FORCE-----	4 OZ MIN
DIFFERENTIAL TRAVEL-----	.001-.004
OVERTRAVEL-----	.140 MIN

ELECTRICAL DATA	
CONTACT ARRANGEMENT SINGLE POLE-DOUBLE THROW-SPLIT CONTACT	
UL LISTED - FILE E12252 CODE L4 5A - 250 VAC	

SCALE FULL				
DO NOT SCALE PRINT				
TOLERANCES APPLY TO DESIGN UNITS. CONVERSIONS ARE ONLY FOR REFERENCE. UNLESS NOTED, TOLERANCES ARE ±				
DIM. mm	TOL. mm/in	DIM. in	TOL. mm/in	
NO PLACES	X	.1/.04	X.X	0.81/03
ONE PLACE	X,X	0.4/.016	X.XX	0.38/.015
TWO PLACES	X,XX	0.15/.006	X.XXX	0.13/.005
THREE PLACES	X,XXX			
ANGLES				
SI METRIC <input type="checkbox"/>		US CUSTOMARY <input checked="" type="checkbox"/>		
DESIGN UNITS <input type="checkbox"/>		US CUSTOMARY <input checked="" type="checkbox"/>		
WEIGHT		.122 LB		

RELEASE NO. SR-4448

M

DRAWING NUMBER

ISSUE

REVISIONS

A	CO-33755
K P K	31 JUL 74
B	CO-69351-D
JWB	18 JUL 91
C	CO-77590
SAD	10 JUN 94
D	CO-77426-B
30 JUN 94	
E	CO-82133
CSL	31 JUL 96

FORMTEK FO-52848-A

REPLACES BZ-3YQ8T

CHECK

5 AUG 74

74 CHECK

5 AUG 74

74 CHECK

5 AUG 74