


Rev	AWO #	Description	Date	Appr
-		RELEASED	10/13/15	

APPROVED: _____ TITLE: _____
 DATE: _____

CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

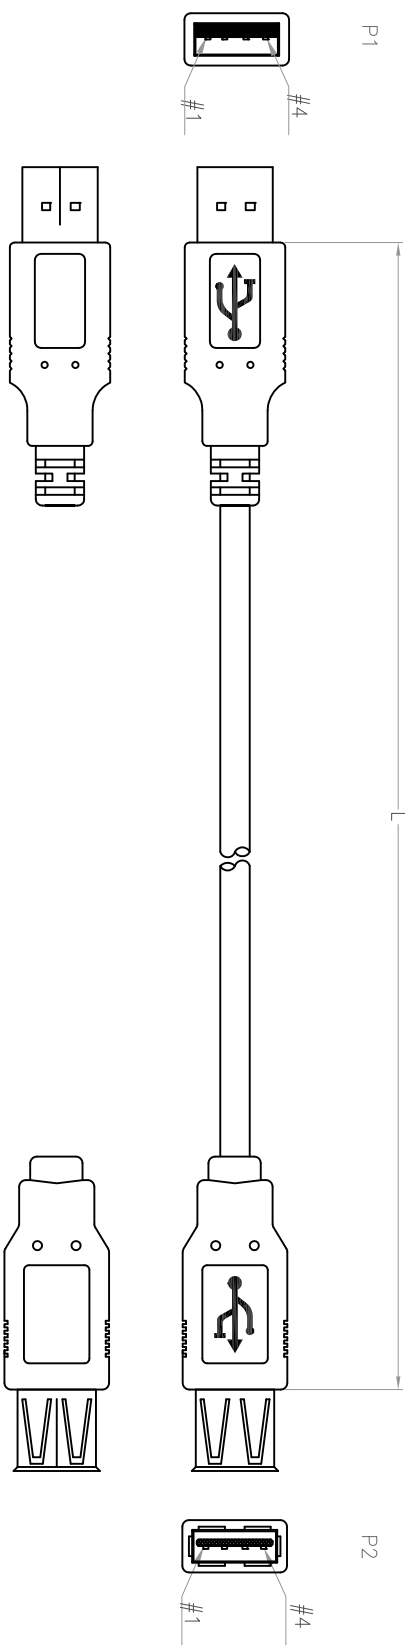

PIN ASSIGNMENT			
P1	1	RED	P2 1
	2	WHITE	P2 2
	3	GREEN	P2 3
	4	BLACK	P2 4
		BRAID	SHELL
			SHELL

ADAM P/N	L
CA-USB-AM/AF-3FT	36.024"±1.181" [915±30mm]
CA-USB-AM/AF-6FT	72.047"±1.969" [1830±50mm]
CA-USB-AM/AF-10FT	120.079"±1.969" [3050±50mm]

SPECIFICATIONS:

Connector:
 P1= USB Connector 2.0 A Type Plug, Insulator Color: White, Overmold Color: Black, 50P PVC
 P2= USB Connector 2.0 A Type Socket, Insulator Color: White, Overmold Color: Black, 50P PVC

Cable:
 UL2725, (1P+2C)+A+B, OD: .189" [4.8mm] (28/24), Jacket Color: Black.

Electrical Test:
 All Assemblies must be 100% Tested for Shorts, Open, Continuity, and Physical Appearance.

Environmental:
 Lead free, RoHS compliant

UNLESS OTHERWISE SPECIFIED
 ALL DIMENSIONS ARE INCHES [MM]
 TOLERANCES: EXCEPT AS NOTED

.X	± .10	ØXX	± .10
.XX	± .020	ØXXX	± .015
.XXX	± .015	ØXXXX	± .010

ADAM TECH
 909 Rahway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

CUSTOMER ASSEMBLY, USB 2.0 PLUG TYPE A
TO USB 2.0 SOCKET TYPE A

APPROVALS	DATE
DRAWN	HR
CHECKED	TW
APPROVED	

SIZE	PART NO.	REV.
X	CA-USB-AM/AF-XFT	-

REF: S00087T SCALE: NTS SHEET 1 OF 1