


# ES SERIES

## RELAY SOCKETS

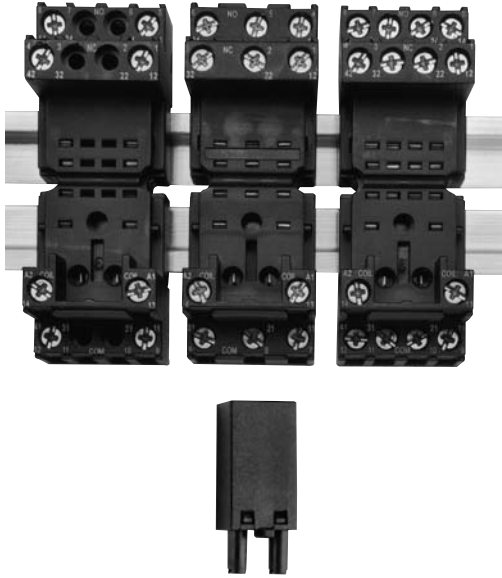

<b>DESCRIPTION</b>	8, 11 and 14 Pin Miniature Sockets, DIN Rail Mountable, Finger Safe
<b>ELECTRICAL RATING</b>	• 300 Volts, 10 Amps  ; 300 Volts, 12 Amps
<b>CONSTRUCTION</b>	<b>Contacts</b> • Brass, Nickel Plated <b>Screws</b> • M3 Steel, Nickel Plated, Maximum Wire Gauge #14 <b>Molding</b> • Break Resistant Thermoplastic
<b>AGENCY APPROVALS</b>	• UL recognized, File No. E113714 • CSA certified, File No. LR26716 • CE

### ORDERING CODE

PART NO.	DESCRIPTION	TERMINAL TYPE
ES15/2N	DPDT, 8 Pin Miniature (Fig. 1)	Box Lug
ES15/3N	3PDT, 11 Pin Miniature (Fig. 2)	Box Lug
ES15/4N	4PDT, 14 Pin Miniature (Fig. 1)	Box Lug


### ACCESSORIES

PART NO.	DESCRIPTION (Refer to the accessories pages 25-27)
C-103-PM	Prepunched Aluminum DIN Rail (1 Meter Lengths)
C-104-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-105-PM	Prepunched Steel DIN Rail (1 Meter Lengths)
C-106-2PM	Prepunched Steel DIN Rail (2 Meter Lengths)
C-108-PM	Prepunched Raised Aluminum DIN Rail (1 Meter Lengths)
C-108-2PM	Prepunched Raised Aluminum DIN Rail (2 Meter Lengths)
MHO	Hold Down Spring
MS35	Hold Down Spring/Ejector


### PLUG-IN INDICATOR AND PROTECTION MODULES

PART NO.	DESCRIPTION
Type 22	Diode for 6-230V DC (+Terminal A1)
Type 42V	Green LED with Diode for 6-24V DC (+ Terminal A1)
Type 42CV	Green LED with Diode for 110-230V DC (+ Terminal A1)
Type 52B	RC Circuit for 6-24V AC
Type 52C	RC Circuit for 110-240V AC
Type 62V	Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92V	Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 62CV	Varistor + Green LED for 6-24V AC/DC (For DC + Terminal A1)
Type 92CV	Varistor + Green LED for 110-240V AC/DC (For DC + Terminal A1)
Type 102	Bypass Resistor 110-240V AC

Fig. 1

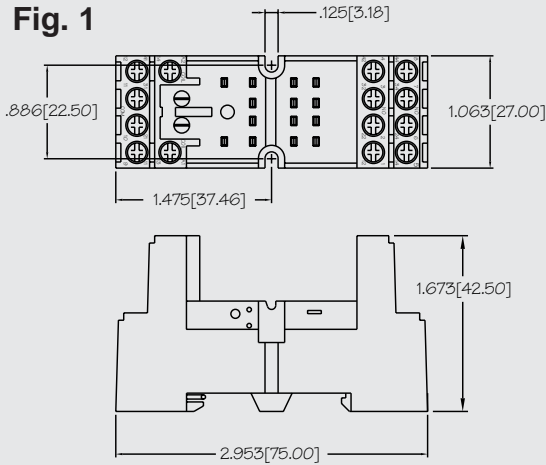

TERMINAL LOCATION




TOP VIEW


### ES15/2N SERIES NOTE:

ES15/2N is the same as ES15/4N but with terminals 2, 3, 6, 7, 10 & 11 omitted

Fig. 2

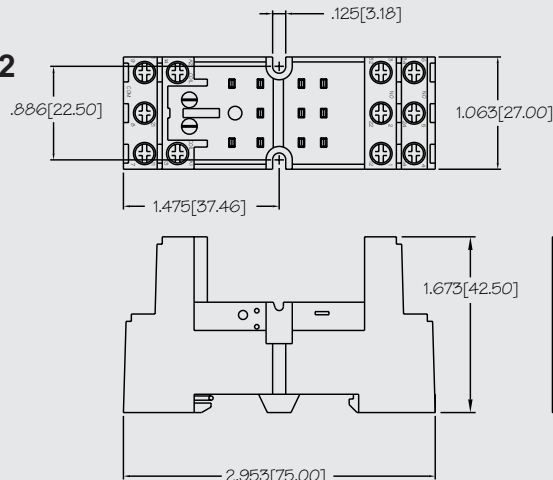

TERMINAL LOCATION



TOP VIEW