


The EXPlora range is most suited to manufacturers of ancillary electrical equipment such as motors, pumps, lighting equipment, process and control gear for use in factories and plant where hazardous or explosive atmospheres can be caused by flammable gases, mists or vapours or by combustible dusts.



Independently tested for compliance to ATEX standards for use in Zone 2 and Zone 22 environments, the new EXP series is manufactured from a tough, high grade UL94V-0 rated Polyester material and provides environmental sealing to IP68. The ATEX coding is: Ex II 3 GD and the certificated no: Baseefa09ATEX0232X.

EXPlora is rated up to 18A, 600Vac/dc for 2, 3, 4 and 5 poles, 16A, 430Vac/dc for 7 pole and 10A, 250Vac/dc for 10 poles. The 3, 4, 5 and 7 pole versions have leading earth contacts making them suitable for single or three phase applications.




- ⊕ ATEX approval for Zone 2 and Zone 22 applications
- ⊕ Independently tested
- ⊕ ATEX Coding:  Ex II 3 GD
- ⊕ ATEX Classification: Ex nA IIC T6 Gc
Ex tc IIIC T85°C Dc
- ⊕ ATEX Certificate No: Baseefa09ATEX0232X
- ⊕ IP68 rating tested at 1.054kg/sq cm (15lb/sq in)
- ⊕ 10m depth for 2 weeks
- ⊕ Up to 18A, 600V ac/dc rating
- ⊕ 2, 3, 4, 5, 7 and 10 pole
- ⊕ Leading earth contact for 3, 4, 5 & 7 pole versions
- ⊕ Trailing Neutral on 5 pole
- ⊕ Plug or socket connection in each body style
- ⊕ Water and dustproof to IP68 when mated
- ⊕ 'Scoop proof' contacts
- ⊕ Field termination - screw terminations
- ⊕ Positive locating keyways - cannot be mis-connected
- ⊕ Sealing caps available to maintain IP68 rating of unmated connectors
- ⊕ Compact design
- ⊕ Easy assembly - no special tools required
- ⊕ Single or 3 phase applications
- ⊕ Cost effective solution
- ⊕ Cable acceptance from 7 to 22mm O/D
- ⊕ Two cable connector versions for 15mm and 22mm (maximum) cable diameters
- ⊕ Separate strain relief on large cable version

Flex Cable Connector



EXP-0911

- Mates with in-line flex or panel mounting versions
- Positive, fast acting locking ring - can be turned with a gloved hand
- Plug or socket versions
- EXP-0 Series 13-15mm cable dia. acceptance as standard, 7-13mm with additional gland pack
- EXP-A Series 20-22mm cable dia. Acceptance as standard, 14-20mm with additional gland pack
- Strain Relief Clamp

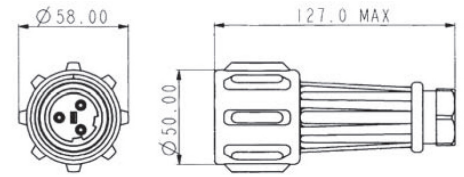


Flex Cable Connector



EXP-A911

- EXP-A Series 20-22mm cable dia. Acceptance as standard, 14-20mm with additional gland pack
- Strain Relief Clamp

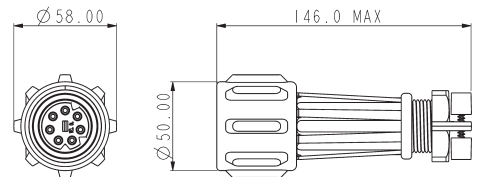


| Standard Cable | Large Cable | Description | Standard Cable | Large Cable | Description |
|----------------|---------------|--------------|----------------|---------------|----------------|
| EXP-0911/02/P | EXP-A911/02/P | 2 pole Plug | EXP-0911/02/S | EXP-A911/02/S | 2 pole Socket |
| EXP-0911/03/P | EXP-A911/03/P | 3 pole Plug | EXP-0911/03/S | EXP-A911/03/S | 3 pole Socket |
| EXP-0911/04/P | EXP-A911/04/P | 4 pole Plug | EXP-0911/04/S | EXP-A911/04/S | 4 pole Socket |
| EXP-0911/05/P | EXP-A911/05/P | 5 pole Plug | EXP-0911/05/S | EXP-A911/05/S | 5 pole Socket |
| EXP-0911/07/P | EXP-A911/07/P | 7 pole Plug | EXP-0911/07/S | EXP-A911/07/S | 7 pole Socket |
| EXP-0911/10/P | EXP-A911/10/P | 10 pole Plug | EXP-0911/10/S | EXP-A911/10/S | 10 pole Socket |

In-Line Flex Cable Connector



EXP-0921

- Mates with either EXP-0911 or EXP-A911 connectors
- Plug or socket versions
- EXP-0 Series 13-15mm cable dia. acceptance as standard, 7-13mm with additional gland pack
- EXP-A Series 20-22mm cable dia. acceptance as standard, 14-20mm with additional gland pack
- Strain Relief Clamp

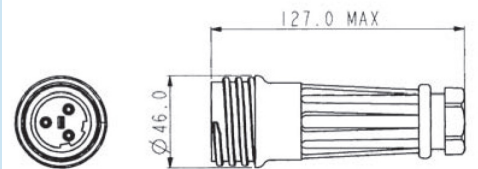


In-Line Flex Cable Connector



EXP-A921

- EXP-A Series 20-22mm cable dia. acceptance as standard, 14-20mm with additional gland pack
- Strain Relief Clamp

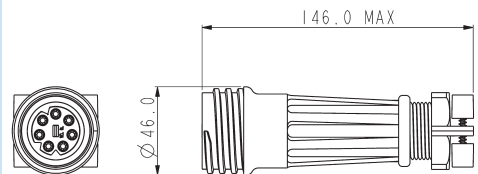


| Standard Cable | Large Cable | Description | Standard Cable | Large Cable | Description |
|----------------|---------------|--------------|----------------|---------------|----------------|
| EXP-0921/02/P | EXP-A921/02/P | 2 pole Plug | EXP-0921/02/S | EXP-A921/02/S | 2 pole Socket |
| EXP-0921/03/P | EXP-A921/03/P | 3 pole Plug | EXP-0921/03/S | EXP-A921/03/S | 3 pole Socket |
| EXP-0921/04/P | EXP-A921/04/P | 4 pole Plug | EXP-0921/04/S | EXP-A921/04/S | 4 pole Socket |
| EXP-0921/05/P | EXP-A921/05/P | 5 pole Plug | EXP-0921/05/S | EXP-A921/05/S | 5 pole Socket |
| EXP-0921/07/P | EXP-A921/07/P | 7 pole Plug | EXP-0921/07/S | EXP-A921/07/S | 7 pole Socket |
| EXP-0921/10/P | EXP-A921/10/P | 10 pole Plug | EXP-0921/10/S | EXP-A921/10/S | 10 pole Socket |

Panel Mounting Connector



EXP-0931

- Mates with EXP-0911 and EXP-A911 connectors
- Single hole fixing
- Anti-rotation key
- High grade sealing gasket
- 3-7mm panel thickness

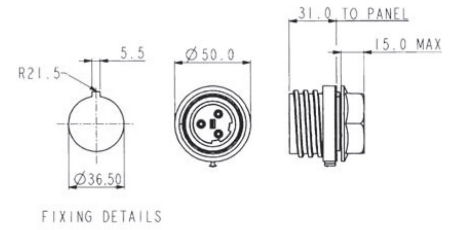

Panel Mounting

| | |
|---------------|--------------|
| EXP-0931/02/P | 2 pole Plug |
| EXP-0931/03/P | 3 pole Plug |
| EXP-0931/04/P | 4 pole Plug |
| EXP-0931/05/P | 5 pole Plug |
| EXP-0931/07/P | 7 pole Plug |
| EXP-0931/10/P | 10 pole Plug |


| | |
|---------------|----------------|
| EXP-0931/02/S | 2 pole Socket |
| EXP-0931/03/S | 3 pole Socket |
| EXP-0931/04/S | 4 pole Socket |
| EXP-0931/05/S | 5 pole Socket |
| EXP-0931/07/S | 7 pole Socket |
| EXP-0931/10/S | 10 pole Socket |

Flange Mounting Connector



EXP-0941

- Mates with EXP-0911 and EXP-A911 connectors
- Supplied with high grade sealing gasket
- Supplied with sealing grommets for panel fixing screws (M6 thread recommended)

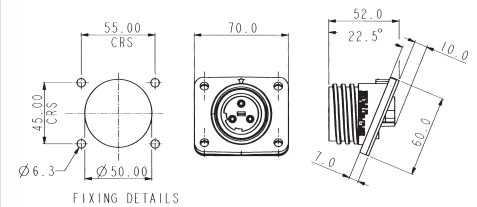

Panel Mounting

| | |
|---------------|--------------|
| EXP-0941/02/P | 2 pole Plug |
| EXP-0941/03/P | 3 pole Plug |
| EXP-0941/04/P | 4 pole Plug |
| EXP-0941/05/P | 5 pole Plug |
| EXP-0941/07/P | 7 pole Plug |
| EXP-0941/10/P | 10 pole Plug |

| | |
|---------------|----------------|
| EXP-0941/02/S | 2 pole Socket |
| EXP-0941/03/S | 3 pole Socket |
| EXP-0941/04/S | 4 pole Socket |
| EXP-0941/05/S | 5 pole Socket |
| EXP-0941/07/S | 7 pole Socket |
| EXP-0941/10/S | 10 pole Socket |

Accessories



EXP-0990, EXP-0991, EXP-0992

- Heavy duty sealing caps to maintain IP68 rating of unmated connectors, with stainless steel straps

Sealing Caps

| | |
|----------|---|
| EXP-0990 | Heavy duty sealing cap for use with EXP-0911/xx/x and EXP-A911/xx/x |
| EXP-0991 | Heavy duty sealing cap for use with EXP-0921/xx/x and EXP-A921/xx/x |
| EXP-0992 | Heavy duty sealing cap for use with EXP-0931 and EXP-0941 |

Cable Glands



PX0980, PXA980

- Packs of 3 additional pairs Cable Glands for 900 Series Flex Cable Connectors

Gland Packs

| | |
|----------|--|
| EXP-0980 | Pack of 3 additional cable glands for EXP-0911 and EXP-0921 to suit cable sizes; 11-13mm, 9-11 and 7-9mm dia. |
| EXP-A980 | Pack of 3 additional cable glands for EXP-A911 and EXP-A921 to suit cable sizes; 18-20mm, 16-18 and 14-16mm dia. |

EXPlora
EXP Series EXPlora - Hazardous Area Connector

Specifications



Electrical:

| | |
|----------------------------|--|
| No Poles: | 2, 3, 4, 5 7 10 |
| Current Rating: | 18A 16A 10A |
| Voltage Rating: | 600Vac/dc 430Vac/dc 250Vac/dc |
| Contact Resistance: | <10mΩ (initial) |
| Insulation Resistance: | >10 ⁶ MΩ (@ 500V dc) |
| Dielectric strength: | 2.2kV ac min |
| AC Breakdown voltage: | 6kV |
| Ambient Temperature Range: | -20°C to +55°C |
| Standards: | ATEX Zone 2 and Zone 22 IEC60079-0:2007 IEC60079-15:2005 |
| ATEX Coding: | Ⓔ II 3 GD |
| ATEX Certificate No: | Baseefa09ATEX0232X |
| ATEX Classification: | Ex nA IIC T6 Gc Ex tc IIIC T85°C Dc |

Materials:

| | |
|----------------------|-------------------------------------|
| Body Mouldings: | Polyester |
| Cap Mouldings: | Polycarbonate |
| Flammability Rating: | UL94V-0 |
| UV Resistance: | To EN50021:1999 |
| Contacts: | Machined Solid Brass, Nickel plated |
| O Rings: | Nitrile Panel |
| Sealing Gasket: | Silicone Rubber |
| RoHS | Compliant |

Mechanical:

| | |
|------------------------------------|---|
| Sealing: | IP68, EN60529:2001 tested @ 1.054kg/sq.cm. (15lb/sq.in.) 10m depth for 2 weeks |
| Cable Acceptance: | EXP-0911 - EXP-0921 13 - 15mm O/D standard, 7-13mm with gland pack EXP-A911 - EXP-A921 20 - 22mm O/D standard, 14 - 20mm with gland pack |
| Contact Accommodation: | 2-7 pole - 2.5 to 4mm ² (13 to10AWG) conductor, single or multi stranded 10 pole - 0.75 to 2mm ² (14 to 18AWG) conductor, single or multi stranded |
| Termination: | Axial screw terminals 22mm dia, 150N 15mm dia, 150N 7mm dia, 80N |
| Cable Retention force: | |
| Gland Nut Torques: | |
| EXP-0 range | 3.16Nm (28lbf/in) |
| 13-15mm (Yellow - std.) | 3.16Nm (28lbf/in) |
| 11-13mm (black) | 3.16Nm (28lbf/in) |
| 9-11mm (white) | 3.16Nm (28lbf/in) |
| 7-9mm (dark grey) | |
| EXP-A range | |
| 20-22mm (Yellow - std.) | 3.16Nm (28lbf/in) |
| 18-20mm (black) | 3.16Nm (28lbf/in) |
| 16-18mm (white) | 3.16Nm (28lbf/in) |
| 14-16mm (dark grey) | 3.16Nm (28lbf/in) |
| Tightening Torques: | |
| Panel mount nut | 2.25 Nm |
| Flange & Bulkhead fixing screws | 0.9 Nm |
| Rear thread EXP-0931 series | M36 x 2-6g |