




UPC Code : 078477487136

Country Of Origin : China



Available Colors :

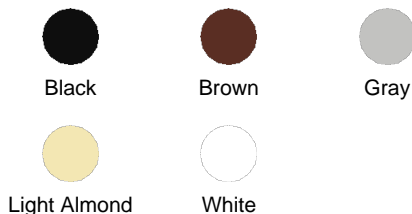

GFTR1-I

15 Amp, 125 Volt Receptacle/Outlet, 20 Amp Feed-Through, Tamper-Resistant, Self-test SmartlockPro GFCI, Monochromatic, back and side wired, nylon wallplate/faceplate, screws and self-grounding clip included - Ivory

- SAFE - Delivers continuous ground fault protection
- SELF TESTING - Automatically self-tests to ensure it can respond to ground fault
- SIMPLE - Status indicator light provides simple, intuitive feedback

Technical Information

Product Features

Amperage : 15 A

At Rated Voltage : 1 HP

Brand : SmartlockPro

Color : Ivory

Feature : Self-Test

Fed Spec WC-596 : Yes

Grade : Residential/Commercial Specification Grade

Grounding : Self Grounding

NEMA : 5-15R

Pole : 2

Standards and Certifications : UL/CSA, NEMA WD6

Strap Material : Galvanized Steel

Tamper Resistant : Yes

Termination : Back & Side

Trip Level : Class A, 5mA plus or minus 1mA

Type : Standard Duplex

Voltage : 125 VAC

Wallplate : Included

Warranty : 2-Year Limited

Wire : 3

AC Horsepower Ratings

At Rated Voltage : 1 HP

Dielectric Voltage : Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Short Circuit Current Rating : 10KA

Temperature Rise : Max 30C after 100 cycles OL at 150 percent rated current

Electrical Specifications

Dielectric Voltage : Withstands 1250VAC per UL 943 and CSA-C22.2 No. 144.1-06

Flammability : Rated V-2 per UL 94

Operating Temperature : -35C to +66C

Short Circuit Current Rating : 10KA

Temperature Rise : Max 30C after 100 cycles OL at 150 percent rated current

Environmental Specifications

Body Material : Polycarbonate

Face Material : Thermoplastic

Grounding Screw : Plated Steel

Line Contacts : Brass Double Wipe .031 Thick

Notes : w/ Wallplate

Product ID : Ratings are permanently marked on device

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Terminal Screws : Plated Steel

Yoke : Zinc-Plated Steel

Mechanical Specifications

Amperage : 15 A

Body Material : Polycarbonate

Brand : SmartlockPro

Color : Ivory

Face Material : Thermoplastic

Feature : Self-Test

Fed Spec WC-596 : Yes

Grade : Residential/Commercial Specification Grade

Grounding : Self Grounding

NEMA : 5-15R

Pole : 2

Product ID : Ratings are permanently marked on device

Standards and Certifications : UL/CSA, NEMA WD6

Strap Material : Galvanized Steel

Tamper Resistant : Yes

Terminal Accom. : 14-10 AWG

Terminal ID : Brass-Hot, Green-Ground, Silver-Neutral

Termination : Back & Side

Torque Range : 14 – 18 in.-lbs

Trip Level : Class A, 5mA plus or minus 1mA

Type : Standard Duplex

Voltage : 125 VAC

Warranty : 2-Year Limited

Wire : 3

Standards and Certifications

Leviton Manufacturing Co., Inc.

201 North Service Road, Melville, NY 11747

Telephone: +1-800-323-8920 · FAX: +1-800-832-9538 · Tech Line (8:30AM-7:30PM E.S.T. Monday-Friday):
+1-800-824-3005

Leviton Manufacturing of Canada, Ltd.

165 Hymus Boulevard, Pointe Claire, Quebec H9R 1E9 · Telephone: +1-800-469-7890 ·

FAX: +1-800-824-3005 · www.leviton.com/canada

Leviton S. de R.L. de C.V.

Lago Tana 43, Mexico DF, Mexico CP 11290 · Tel.: (+52)55-5082-1040 · FAX: (+52)5386-
1797 · www.leviton.com.mx

Visit our Website at: www.leviton.com

© 2018 Leviton Manufacturing Co., Inc. All Rights Reserved. Subject to change without notice.

Leviton has a global presence.

If you would like to know where your local Leviton office is located please go to:

www.leviton.com/international/contacts/

