


DASH NO.	M CODE	MADE FROM
----------	--------	-----------

GSD

M39012/20-0101

REVISIONS	
ISSUE	CHANGES
7	CN 33349 E REDRAWN KH 08/30/91
8	CN 34387 E KH 03/09/93

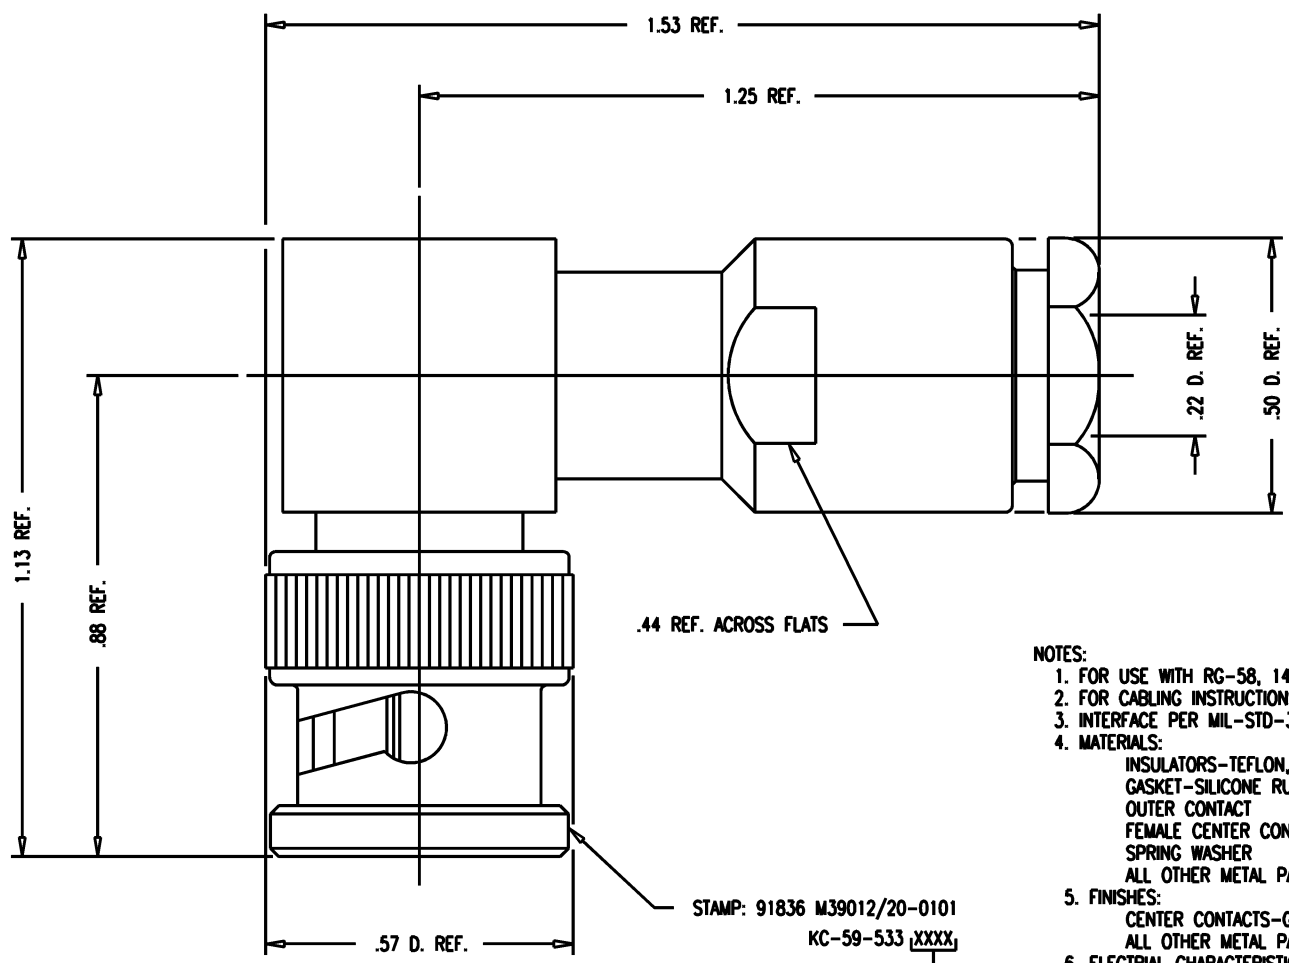

STAMP: 91836 M39012/20-0101
KC-59-533 XXXX
DATE CODE

- NOTES:
- FOR USE WITH RG-58, 142, 223 & 400/U CABLE.
 - FOR CABLING INSTRUCTIONS SEE CP-1050.
 - INTERFACE PER MIL-STD-348, FIG. 301-1.
 - MATERIALS:
INSULATORS-TEFLON, ASTM-D-1457
GASKET-SILICONE RUBBER, ZZ-R-765
OUTER CONTACT } BER. COP., ASTM-B-196
FEMALE CENTER CONTACT }
SPRING WASHER }
ALL OTHER METAL PARTS-BRASS, ASTM-B16
 - FINISHES:
CENTER CONTACTS-GOLD PLATE PER MIL-G-45204
ALL OTHER METAL PARTS-SILVER PLATE PER QQ-S-365
 - ELECTRIAL CHARACTERISTICS:
NOMINAL IMPEDANCE-50 OHMS
FREQUENCY RANGE-DC TO 4 GHZ
WORKING VOLTAGE-500 VRMS

KAM1402

SCALE 4:1	
APPROX SURFACE AREA KC-59-533	
USED ON	
REF:	
PL, ANG, BNC	
DRAWN KH	DATE 09/06/91
DESIGN MJB	DATE 07/29/92
APPR.	DATE

KINGS
ELECTRONICS CO., INC.
TUCKAHOE, NEW YORK 10707

M39012/20-0101

GSD