

AS85049/59 Shrink Boot Adapter



Shrink Boot
Adapters

Glenair Connector
Designator C

MIL-C-22992

M85049/59 A 10

Basic Part No. _____ Adapter Size

Finish _____

A = Black Anodize
W = 500 Hour Cadmium Olive Drab
Over Electroless Nickel

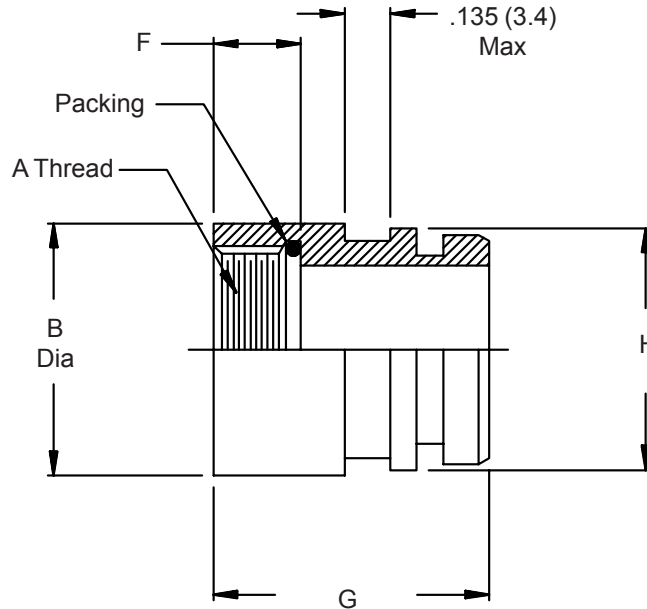


TABLE I

Adapter Size	A Thread Class 2B-LH	B Max	F ±.016 (.4)	G ±.031 (.8)	H Dia ±.010 (.3)	Shrink Boot Reference
12	.750 - 20 UNEF	.933 (23.7)	.479 (12.2)	1.175 (29.8)	.798 (20.3)	770-003S103
14	.875 - 20 UNEF	1.057 (26.8)	.479 (12.2)	1.175 (29.8)	.922 (23.4)	770-003S104
16	1.000 - 20 UNEF	1.182 (30.0)	.479 (12.2)	1.175 (29.8)	1.048 (26.6)	770-003S104
18	1.125 - 18 UNEF	1.307 (33.2)	.479 (12.2)	1.175 (29.8)	1.172 (29.8)	770-003S105
20	1.250 - 18 UNEF	1.532 (38.9)	.479 (12.2)	1.175 (29.8)	1.297 (32.9)	770-003S106
22	1.375 - 18 UNEF	1.557 (39.5)	.479 (12.2)	1.175 (29.8)	1.423 (36.1)	770-003S107
24	1.625 - 18 UNEF	1.797 (45.6)	.479 (12.2)	1.175 (29.8)	1.662 (42.2)	770-003S108
28	1.875 - 16 UN	2.057 (52.2)	.479 (12.2)	1.175 (29.8)	1.922 (48.8)	770-003S108
32	2.062 - 16 UN	2.307 (58.6)	.479 (12.2)	1.175 (29.8)	2.172 (55.2)	770-003S108
36	2.312 - 16 UN	2.557 (64.9)	.479 (12.2)	1.175 (29.8)	2.422 (61.5)	770-003S109
40	2.625 - 16 UN	2.869 (72.9)	.667 (16.9)	1.375 (34.9)	2.734 (69.4)	Consult Factory
44	2.875 - 16 UN	3.120 (79.2)	.667 (16.9)	1.375 (34.9)	2.982 (75.7)	Consult Factory

1. For complete dimensions see applicable Military Specification.
2. Metric dimensions (mm) are indicated in parentheses.