

Aluminium Electrolytic Capacitors - Screw Terminals

multicomp PRO

**RoHS
Compliant**



Specifications

- Voltage range: 50 V DC to 550 V DC
- Can size: 35φ × 62mm to 90φ × 240mm
- Operating Temperature range: -40°C to +85°C
- Capacitance: 330μF to 470000μF Tolerance ±20%
- Leakage current: The max. leakage current (IL) is given by the formula:

$$I_r = 0.003 CV \text{ (microamps)}$$

C = capacitance in microfarads

V = DC rated voltage

Pre-conditioning of the capacitors prior to testing for leakage current is essential.

Ripple Current: All capacitors withstand rms ripple current at 100 Hz at 85°C. When capacitors operate at temperatures other than 85°C, the permissible rms ripple current at 85°C should be multiplied by the factors given below:

+40°C	+45°C	+50°C	+65°C
2.2	2.1	1.9	1.6

Where capacitors are required to operate at frequencies other than 100 Hz, the multiplying factors given below, may be used to determine the ripple current capacity, at that frequency.

Frequency Hz	100	250	500	1k to 10k	>10K
Multiplying Factor	1.0	1.05	1.20	1.32	1.35

Notes:

1. Can is negative, However, it is isolated with a PVC insulating sleeve and polypropylene end-disc.
2. Maximum ripple current for each capacitor diameter.

Capacitor Diameter (mm)	35	50	63	76	90
Max. Ripple Current (Amps)	20	20	40	40	72

Capacitor mounting

Capacitors are available in screw terminals in three mounting styles

AEST - Screw terminals with plain insulated base.

AEST-D - Screw terminals with stud mounting.

Capacitor Terminal Style

Capacitors are available in two different terminal style, round and across flat. Below table summarizes the available terminal styles in different capacitors diameter

Capacitors Diameter (mm)	35	50	63	76	90
Terminal Style - Round	○	○	○	○	○
Terminal Style - Across Flat		○	○	○	○

Aluminium Electrolytic Capacitors - Screw Terminals



Usefullife

Useful life is a period of time which the capacitor takes to reach "end of life".

For PG-601 capacitors the useful life is estimated as 12000 hours at maximum rated temperature, ripple current and voltages.

End of the defined as follows:

1. Catastrophic failure: capacitor short or open circuit
2. Mechanical failure: operation of safety vent or sleeve damage
3. Parametric failure:
 - a. Capacitance change $\pm 30\%$
 - b. ESR exceed three times specified value
- c. Leakage current exceed specified value

The useful life for a known ripple current load and ambient temperature (T_a) °C is determined on the basis of the "Life graph" shown below

Manufacturing Date Code Chart


The manufacturing code shall consists of four digits (alphanumeric). The first two shall denote the date (numeric). The third stands for the month (alpha numeric). The fourth stands for the year (alphabet)

First two spaces DATE	Third space MONTH	Fourth space YEAR
01	1 = JANUARY	A = 2012
02	2 = FEBRUARY	B = 2013
03	3 = MARCH	C = 2014
.	4 = APRIL	D = 2015
.	5 = MAY	E = 2016
.	6 = JUNE	F = 2017
10	7 = JULY	G = 2018
11	8 = AUGUST	H = 2019
.	9 = SEPTEMBER	J = 2020
.	X = OCTOBER	K = 2021
.	Y = NOVEMBER	L = 2022
31	Z = DECEMBER	M = 2023

For example:

1. Manufacturing code 023A will mean 2nd March, 2012
2. Manufacturing code IOXA will mean 10111 October, 2012

**LIFE GRAPH
PG -6DI**

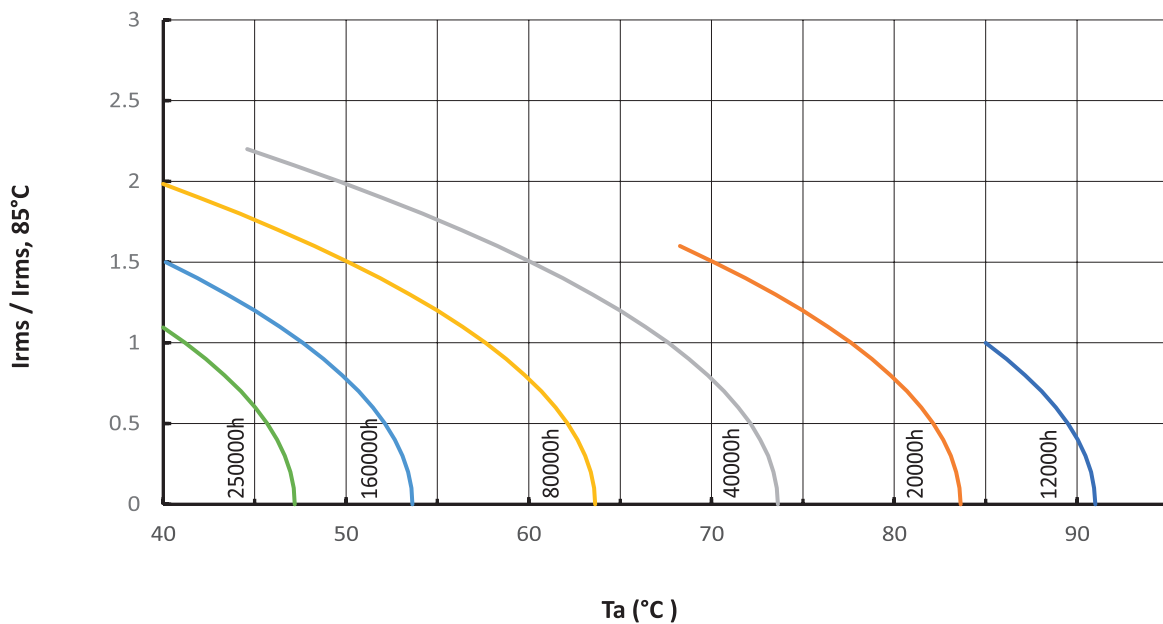

Aluminium Electrolytic Capacitors - Screw Terminals

multicomp PRO

Standard Capacitor Values

Rated Voltage (VDC)	Surge Voltage (VDC)	Capacitance Nominal (µF)	MAX ESR at 100Hz, 25°C (Ohms)	Ripple Current (Irms, 85°C) at 100Hz, 85°C(Amps)	Can size Nominal D × L mm	Terminal Style	Part Number
400	440	2200	62.5	8.49	63 × 120	AEST	MP004243
350	385	10000	15.0	25.30	76 × 220	AEST	MP004244
350	385					AEST-D	MP004245
350	385	2200	51.2	9.37	63 × 120	AEST-D	MP004246
450	495	2200	72.7	7.87	63 × 120	AEST	MP004247
450	495					AEST-D	MP004248
500	550	2200	68.0	9.44	76 × 105	AEST	MP004249
500	550					AEST-D	MP004250
350	385	2200	51.2	9.37	63 × 120	AEST	MP004251
400	440	2200	62.5	8.49	63 × 120	AEST-D	MP004252
500	550	3300	54.6	12.10	76 × 146	AEST	MP004253
500	550					AEST-D	MP004254
350	385	3300	37.9	10.89	63 × 120	AEST	MP004255
350	385					AEST-D	MP004256
400	440	3300	51.5	10.39	76 × 120	AEST	MP004257
400	440					AEST-D	MP004258
450	495	3300	52.1	11.20	76 × 146	AEST	MP004259
450	495					AEST-D	MP004260
500	550	4700	41.7	13.30	90 × 105	AEST	MP004261
500	550					AEST-D	MP004262
350	385	4700	33.6	13.95	76 × 146	AEST	MP004263
350	385					AEST-D	MP004264
400	440	4700	40.3	12.74	76 × 146	AEST	MP004265
400	440					AEST-D	MP004266
450	495	4700	33.8	13.92	76 × 146	AEST	MP004267
450	495					AEST-D	MP004268
450	495	5600	28.6	15.35	90 × 120	AEST	MP004269
450	495					AEST-D	MP004270
500	550	5600	39.7	14.40	90 × 120	AEST	MP004271
500	550					AEST-D	MP004272
350	385	5600	25.7	15.95	76 × 146	AEST	MP004273
350	385					AEST-D	MP004274
400	440	5600	36.6	13.37	76 × 146	AEST	MP004275
400	440					AEST-D	MP004276
350	385	6800	22.0	17.25	76 × 146	AEST	MP004277
350	385					AEST-D	MP004278
400	440	6800	38.2	15.84	76 × 220	AEST	MP004279
400	440					AEST-D	MP004280

Newark.com/multicomp-pro
 Farnell.com/multicomp-pro
 Element14.com/multicomp-pro


multicomp PRO

Aluminium Electrolytic Capacitors - Screw Terminals

multicomp PRO

Terminal Style And Dimension With Round Insert

Screw Terminal Type AEST/AEST-D

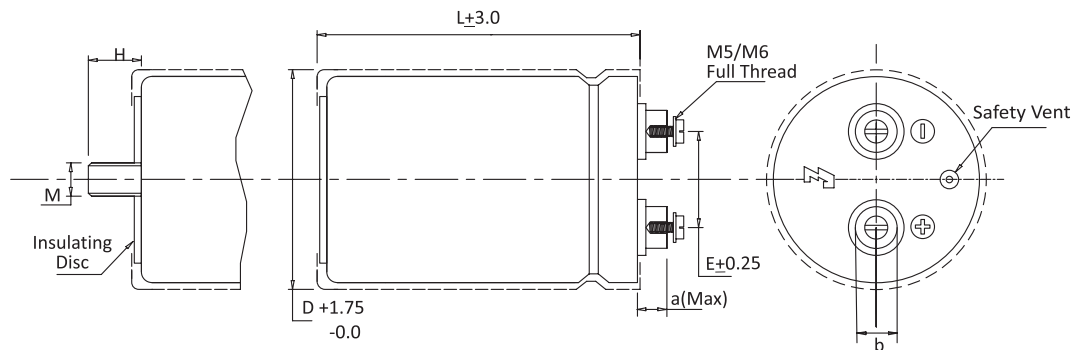

AEST -Screw terminals with plain insulated base.

AEST-D - Screw terminals with stud mounting.

Dimensions : Millimetres

Terminal	D	E	L	a (Max)	b ±0.1	M	H ±1.0
MS	35	12.6	62	7.8	9.5	-	-
MS	35	12.6	80	7.8	9.5	-	-
MS	35	12.6	105	7.8	9.5	-	-
MS	50	22.1	80	7.8	9.5	MU	17
MS	50	22.1	105	7.8	9.5	MU	17
MS	50	22.1	120	7.8	9.5	MU	17
MS	63	28.5	105	7.8	12	MU	17
MS	63	28.5	120	7.8	12	MU	17
MS	63	28.5	146	7.8	12	MU	17
MS	76	31.6	105	7.8	12	MU	17
MS	76	31.6	120	7.8	12	MU	17
MS	76	31.6	146	7.8	12	MU	17
MS	76	31.6	175	7.8	12	MU	17
MS	76	31.6	220	7.8	12	MU	17
MS	76	31.6	240	7.8	12	MU	17
M6	76	31.6	105	5.3*	16	MU	17
M6	76	31.6	120	5.3*	16	MU	17
M6	76	31.6	146	5.3*	16	MU	17
M6	76	31.6	175	5.3*	16	MU	17
M6	76	31.6	220	5.3*	16	MU	17.0
M6	76	31.6	240	5.3*	16	MU	17.0
M6	90	32	105	5.3*	16	MU	17.0
M6	90	32	146	5.3*	16	MU	17.0
M6	90	32	175	5.3*	16	MU	17.0
M6	90	32	220	5.3*	16	MU	17.0
M6	90	32	240	5.3*	16	MU	17.0

* Low Post Design

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro


multicomp PRO

Aluminium Electrolytic Capacitors - Screw Terminals

multicomp PRO

Terminal Style And Dimension With A/F Insert

Screw Terminal Type AEST/AEST-D

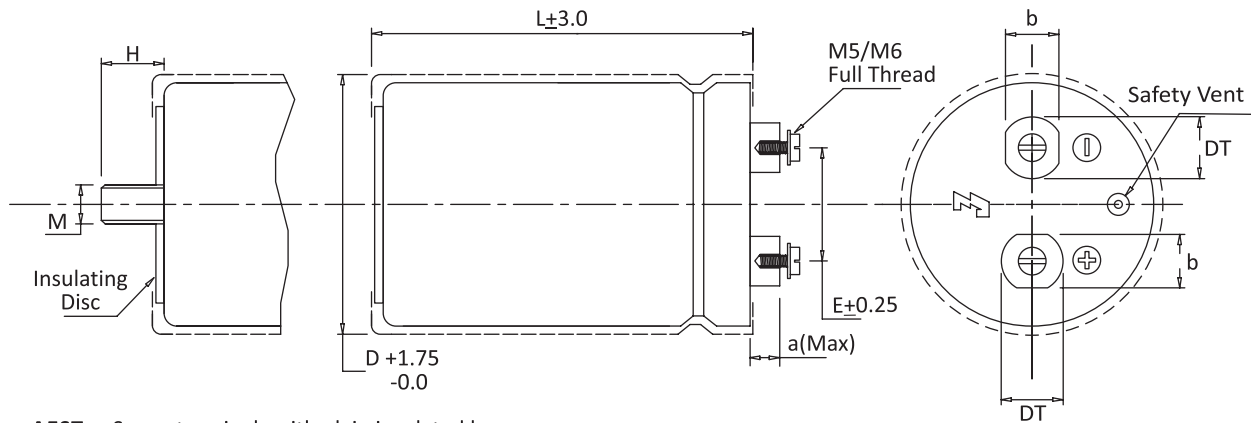

AEST -Screw terminals with plain insulated base.

AEST-D - Screw terminals with stud mounting.


Dimensions : Millimetres

Terminal	D	E	L	a (Max)	b (-0.2/+0.1)	DT (±0.1)	M	H ±1.0
M6	63	28.5	105	6.5	13	15	12	17
M6	63	28.5	120	6.5	13	15	12	17
M6	63	28.5	146	6.5	13	15	12	17
M6	76	31.6	105	6.5	13	15	12	17
M6	76	31.6	120	6.5	13	15	12	17
M6	76	31.6	146	6.5	13	15	12	17
M6	76	31.6	175	6.5	13	15	12	17
M6	76	31.6	220	6.5	13	15	12	17
M6	76	31.6	240	6.5	13	15	12	17
M6	90	32	105	6.5	13	15	12	17
M6	90	32	120	6.5	13	15	12	17
M6	90	32	146	6.5	13	15	12	17
M6	90	32	175	6.5	13	15	12	17
M6	90	32	220	6.5	13	15	12	17
M6	90	32	240	6.5	13	15	12	17
M6	100	32	105	6.5	13	15	12	17
M6	100	32	120	6.5	13	15	12	17
M6	100	32	146	6.5	13	15	12	17
M6	120	41.5	105	6.5	13	15	12	17
M6	120	41.5	120	6.5	13	15	12	17
M6	120	41.5	146	6.5	13	15	12	17

Aluminium Electrolytic Capacitors - Screw Terminals


multicomp PRO

Terminal Style And Dimension

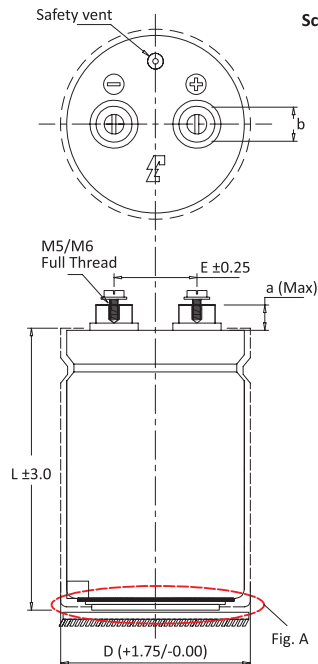

Screw Terminal Type AEST-AL

Note :
Ripple current rating of a capacitor with AEST-AL mounting can increase 20-30% with efficient cooling of the aluminum mounting plate / heat sink

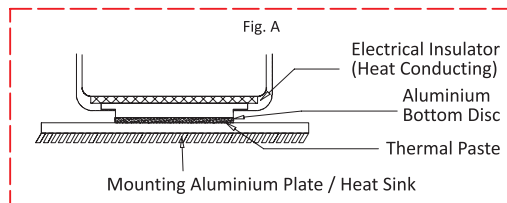

Dimensions : Millimetres

Terminal	D	E	L	a (Max)	b ±0.1
M5	63	28.5	105	7.8	12
M5	63	28.5	120	7.8	12
M5	63	28.5	146	7.8	12
M5	76	31.6	105	7.8	12
M5	76	31.6	120	7.8	12
M5	76	31.6	146	7.8	12
M5	76	31.6	175	7.8	12
M5	76	31.6	220	7.8	12
M5	76	31.6	240	7.8	12
M6	76	31.6	105	5.3*	16
M6	76	31.6	120	5.3*	16
M6	76	31.6	146	5.3*	16
M6	76	31.6	175	5.3*	16
M6	76	31.6	220	5.3*	16
M6	76	31.6	240	5.3*	16
M6	90	32	105	5.3*	16
M6	90	32	146	5.3*	16
M6	90	32	175	5.3*	16
M6	90	32	220	5.3*	16
M6	90	32	240	5.3*	16

* Low Post Design

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro


multicomp PRO

Aluminium Electrolytic Capacitors - Screw Terminals




Mounting Accessories

Mounting Nut and Washers for Cans with Bottom Stud

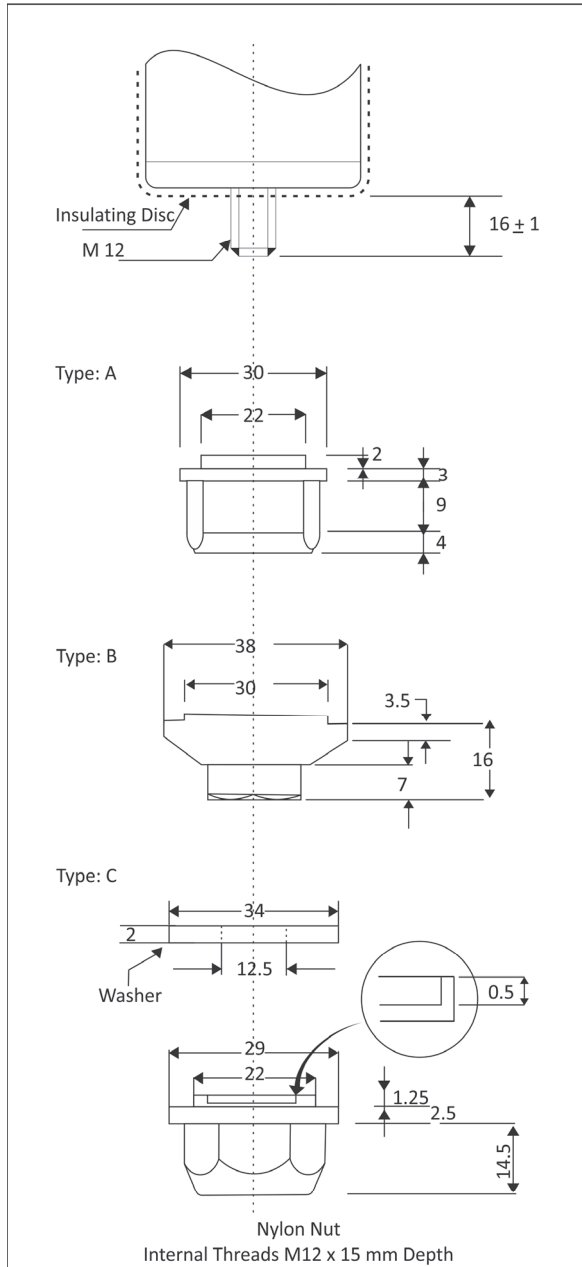

Vertical Mounting Clamps

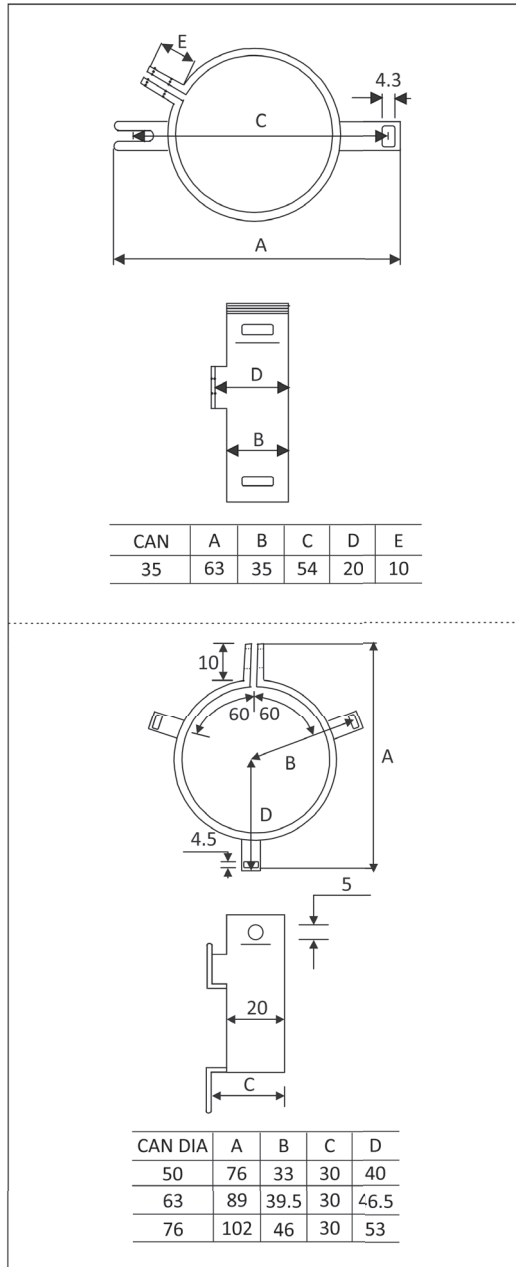

Important Notice : This data sheet and its contents (the "Information") belong to the members of the AVNET group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp Pro is the registered trademark of Premier Farnell Limited 2019.

Newark.com/multicomp-pro
Farnell.com/multicomp-pro
Element14.com/multicomp-pro

