
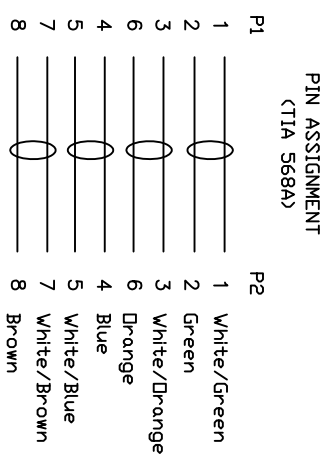
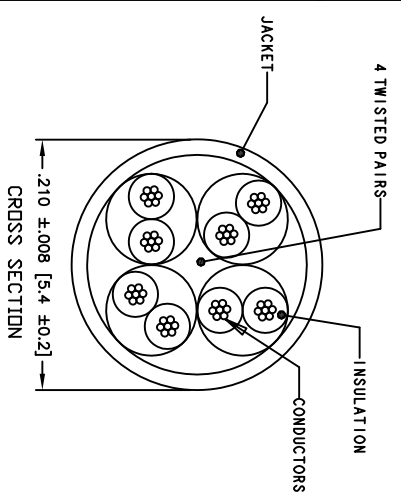
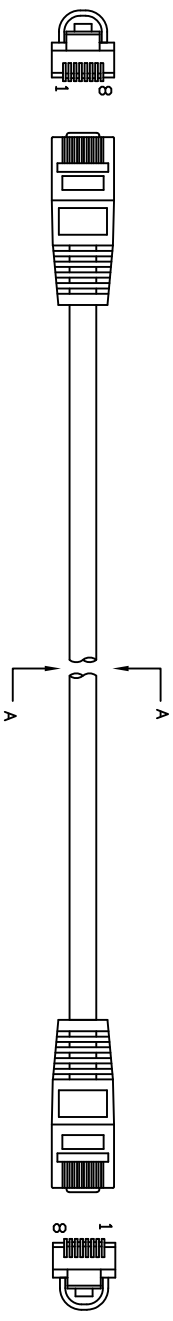


Rev	AWO #	Description	Date	Appr
-		RELEASED	3/25/15	

APPROVED: _____ DATE: _____ TITLE: _____
 CUSTOM CABLE ASSEMBLIES ARE NON-CANCELLABLE/NON-RETURNABLE

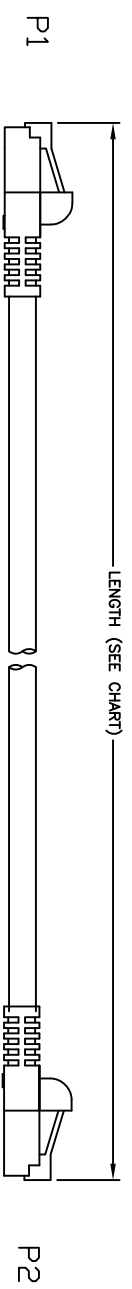

LENGTH	CODE
12.0 ±.39 [305 ±10]	01
36.0 ±1.2 [915 ±30]	03
60.0 ±1.5 [1,525 ±40]	05
84.0 ±1.9 [2,135 ±50]	07
120.0 ±2.4 [3,050 ±60]	10
168.0 ±2.4 [4,270 ±60]	14
300.0 ±2.4 [7,625 ±60]	25
600.0 ±2.7 [15,250 ±70]	50
1,200.0 ±2.7 [30,500 ±70]	100

COLOR	CODE
BLUE	BU
ORANGE	OR
WHITE	WT
BLACK	BK
RED	RD
GREEN	GR
GREY	GY
PURPLE	PU

NPC-5E-XXX-XX-BB

SPECIFICATIONS:

Plugs: RJ45, 8P8C, CAT 5e Plug, Long Body, Polycarbonate, Rated UL94V-0, Gold plated.
 Boots: PVC, Bubble style
 Cable: Cat 5e, UTP 24 AWG X 4P, Stranded bare Copper, 350MHZ
 O.D.: 5.4mm ±0.2mm, UL, cUL & ETL verified
 Jacket color (See Chart)

Electrical: HI-Pot: 300V DC / 10ms
 100% tested for Open, shorts and crossed wires
 Environmental: Lead free, RoHS compliant

ADAM TECH

909 Railway Avenue, Union, NJ 07083
 Phone: 908-687-5000 Fax: 908-687-5710

TITLE: RJ45 NETWORK PATCH CABLE, CAT 5e, 350MHz, UTP, STRANDED, BUBBLE BOOT

UNLESS OTHERWISE SPECIFIED ALL DIMENSIONS ARE INCHES [MM] TOLERANCES: EXCEPT AS NOTED	
INCHES	HOLES
.X ±.10	ØX ±.10
.XX ±.020	ØXX ±.015
.XXX ±.015	ØXXX ±.010
APPROVALS	DATE
DRAWN	SS
CHECKED	
APPROVED	
SIZE	PART NO.
X	NPC-5E-XXX-XX-BB
SCALE:	INTS
SHEET	1 OF 1