
OA254EC XC Series



EC Fan - 115V, 230V 254x89mm (10.0"x 3.5")



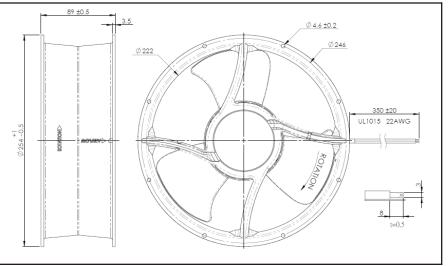


Frame	Diecast Aluminum	
Impeller	PBT UL94V0- Plastic	
Connection	2x 350mm Lead wires (22AWG) or terminals	
Motor	Brushless EC motor, electronically protected	
Bearing System	Dual ball	
Insulation Resistance	>10M ohm between leadwire and frame (500VDC)	
Dielectric Strength	1 secat 1800 VAC, 50/60Hz	

Operating Temperature **Ball Bearing** -20C ~ +70C

Life Expectancy **Ball Bearing** 60,000 hours (L10 at 40C)

Weight: ~ 4.61 lbs

Storage Temperature -30C ~ +75C



Part Number	OA254EC-11-1 * XC	OA254EC-22-1 * XC
Nominal Voltage	115 VAC	230 VAC
Rated Power	75W	72W
Rated Current	1.05A	0.64A
Frequency (Hz)	50 / 60	50 / 60
Rated Speed (RPM)	2750	2750
Airflow (CFM)	830	830
Noise Level (dB)	70	70
Max. Static Pressure	1.20"H ₂ 0	1.20"H ₂ 0

m2

^{*} Indicate "TB" (Terminal Ball Bearing), "WB" (13.78" Wire Leads, Ball Bearing)









