



Specifications:

Connector Type	: DIP Socket
Pitch Spacing	: 2.54mm
Row Pitch	: 7.62mm
Contact Termination	: Through Hole Vertical
Contact Material	: Beryllium Copper
Contact Plating	: Gold

Technical Data

Material:

Pin (outer sleeve)	: Brass, machined, CuZn38Pb2
Clip (contact 4 finger)	: Beryllium copper, heat treated or PHBZ
Plating (outer sleeve)	: 2 μ m / 80 μ " Nickel, Gold Flash
Plating Clip (contact)	: 2 μ m / 80 μ " Nickel, Gold Flash
Insulator Body (black)	: Glass filled Thermoplastic Polyester

Electrical:

Current Rating	: 3 Amps / contact max.
Contact Resistance	: 4m / contact
Insulation Resistance	: 10,000M Ω at 500V AC
Rated Voltage	: 100 V _{RMS} / 150V DC


Mechanical:

Operating Temperature	: -40°C to +150°C
(Continuous)	: -67°C to +105°F
Average insertion force with steel pin of	: $\text{£} \times 0.43\text{mm} / 0.017"$ < 250g
Average withdrawal force with steel pin of	: $\text{£} \times 0.43\text{mm} / 0.017"$ > 50g
Mechanical Life	: Min. 200 Cycles

Environmental Data:

Solderability (IEC 60068-2-20. Ta)	: 235°C, 2 sec
Resistance to soldering heat (IEC 60068-2-20. Tb)	: Through hole mount components : 260°C, 10 sec

PCB IC Socket

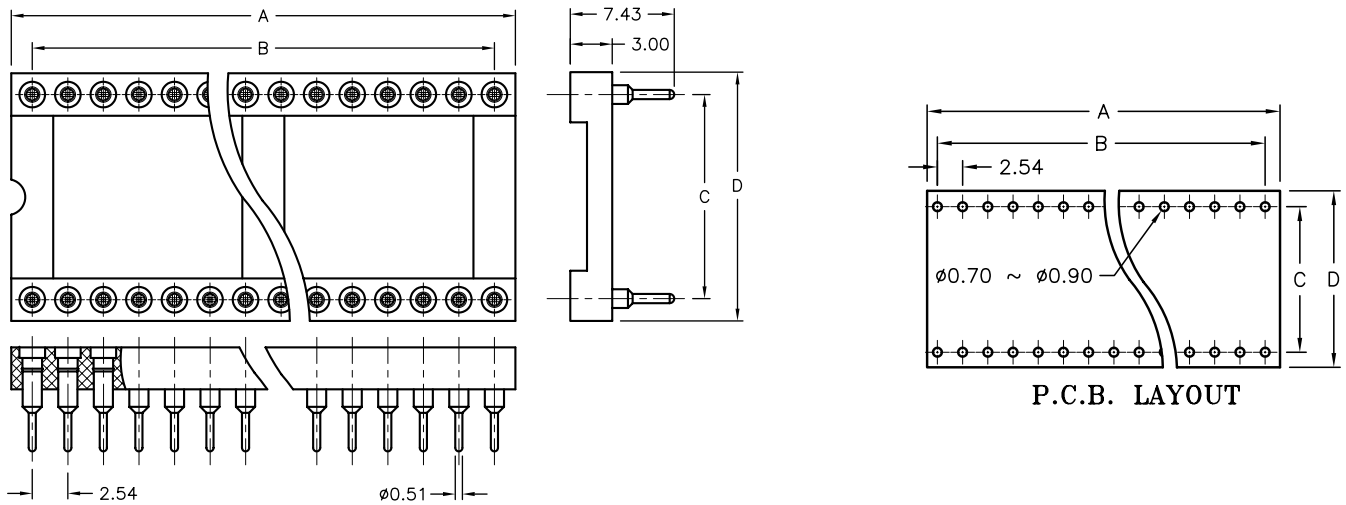

Dimensions : Millimetres

Part Number Table

Description	Number of Pins	Dimensions				Part Number
		A	B	C	D	
PCB IC Socket, Solder Tail, Gold Sleeve, Gold Clip	8	10.16	7.62	76	10.16	SPC15511
	14	17.78	15.24			SPC15513
	16	20.32	17.78			SPC15516
	20	25.40	22.86			SPC15520
	28	35.56	33.02	15.24	17.78	SPC15523

Important Notice : This data sheet and its contents (the "Information") belong to the members of the Premier Farnell group of companies (the "Group") or are licensed to it. No licence is granted for the use of it other than for information purposes in connection with the products to which it relates. No licence of any intellectual property rights is granted. The Information is subject to change without notice and replaces all data sheets previously supplied. The Information supplied is believed to be accurate but the Group assumes no responsibility for its accuracy or completeness, any error in or omission from it or for any use made of it. Users of this data sheet should check for themselves the Information and the suitability of the products for their purpose and not make any assumptions based on information included or omitted. Liability for loss or damage resulting from any reliance on the Information or use of it (including liability resulting from negligence or where the Group was aware of the possibility of such loss or damage arising) is excluded. This will not operate to limit or restrict the Group's liability for death or personal injury resulting from its negligence. Multicomp is the registered trademark of the Group. © Premier Farnell plc 2012.

www.element14.com
www.farnell.com
www.newark.com

