T4151210005-005 - ACTIVE

TE Internal #: T4151210005-005 M8/M12 Cable Assemblies, Sensor/Actuator, 5 Positions, A M8 /M12 Cable Assembly Keying, Plug, M12 Pigtail, Right Angle, Cable Assembly Length 5000 mm

View on TE.com >



Cable Assemblies > Copper Cable Assemblies > M8/M12 Cable Assemblies > M12 A-CODE MALE R/A SINGLE ENDED CABLE



M8/M12 Application Type: Sensor/Actuator

Number of M8/M12 Cable Assembly Positions: 5 M8/M12 Cable Assembly Keying: A

M8/M12 Cable Assembly Connector Type: Plug

M8/M12 Cable Assembly Type: M12 Pigtail

All M12 A-CODE MALE R/A SINGLE ENDED CABLE (140)

Features

Product Type Features

LED	Without
Cable Type	PVC
Product Type	Cable Assembly
Assembly Type	Pigtail
M8/M12 Cable Assembly Connector Type	Plug
M8/M12 Cable Assembly Type	M12 Pigtail
M8/M12 Cable Assembly Shielded	No
Configuration Features	
Number of M8/M12 Cable Assembly Positions	5
M8/M12 Cable Assembly Keying	A
M8/M12 Cable Assembly Configuration	Single Ended
Electrical Characteristics	
Operating Voltage	60 VDC

T4151210005-005

M8/M12 Cable Assemblies, Sensor/Actuator, 5 Positions, A M8/M12 Cable Assembly Keying, Plug, M12 Pigtail, Right Angle, Cable Assembly Length 5000 mm



Body Features

Cable Exit Angle	Right Angle
Environmental Protection	With
Conductor Material	Copper Alloy
Cable Jacket Color	Black
Contact Features	
Contact Current Rating	4 A
Mechanical Attachment	
Screw & Hole Thread Size	M12
M8/M12 Cable Assembly Mounting Angle	Right Angle
Housing Features	
M8/M12 Cable Assembly Housing Material	GF Nylon
Dimensions	
Wire Size	22 AWG
Cable Assembly Length	5000 mm
Operation/Application	
M8/M12 Application Type	Sensor/Actuator

Other

Field Serviceable

Yes

Product Compliance

For compliance documentation, visit the product page on TE.com>

EU RoHS Directive 2011/65/EU Compliant with Exemptions EU ELV Directive 2000/53/EC Compliant with Exemptions Restricted Materials Above Threshold China RoHS 2 Directive MIIT Order No 32, 2016 EU REACH Regulation (EC) No. 1907/2006 Current ECHA Candidate List: JUN 2020 (209) Candidate List Declared Against: JAN 2020 (205) SVHC > Threshold: Pb (1.9% in Pb-Alloy in Copper) Article Safe Usage Statements: Do not eat, drink or smoke when using this product. Wash thoroughly after handling. Recycle if possible and dispose of the article by following all applicable governmental regulations relevant to your geographic location. Halogen Content Not Yet Reviewed for halogen content

T4151210005-005

M8/M12 Cable Assemblies, Sensor/Actuator, 5 Positions, A M8/M12 Cable Assembly Keying, Plug, M12 Pigtail, Right Angle, Cable Assembly Length 5000 mm



Solder Process Capability

Not applicable for solder process capability

Product Compliance Disclaimer


This information is provided based on reasonable inquiry of our suppliers and represents our current actual knowledge based on the information they provided. This information is subject to change. The part numbers that TE has identified as EU RoHS compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, mercury, PBB, PBDE, DBP, BBP, DEHP, DIBP, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2011/65/EU (RoHS2). Finished electrical and electronic equipment products will be CE marked as required by Directive 2011/65/EU. Components may not be CE marked. Additionally, the part numbers that TE has identified as EU ELV compliant have a maximum concentration of 0.1% by weight in homogenous materials for lead, hexavalent chromium, and mercury, and 0.01% for cadmium, or qualify for an exemption to these limits as defined in the Annexes of Directive 2000/53/EC (ELV). Regarding the REACH Regulation, the information TE provides on SVHC in articles for this part number is based on the latest European Chemicals Agency (ECHA) 'Guidance on requirements for substances in articles' posted at this URL: https://echa.europa.eu/guidance-documents/guidance-on-reach

Compatible Parts



Customers Also Bought

9

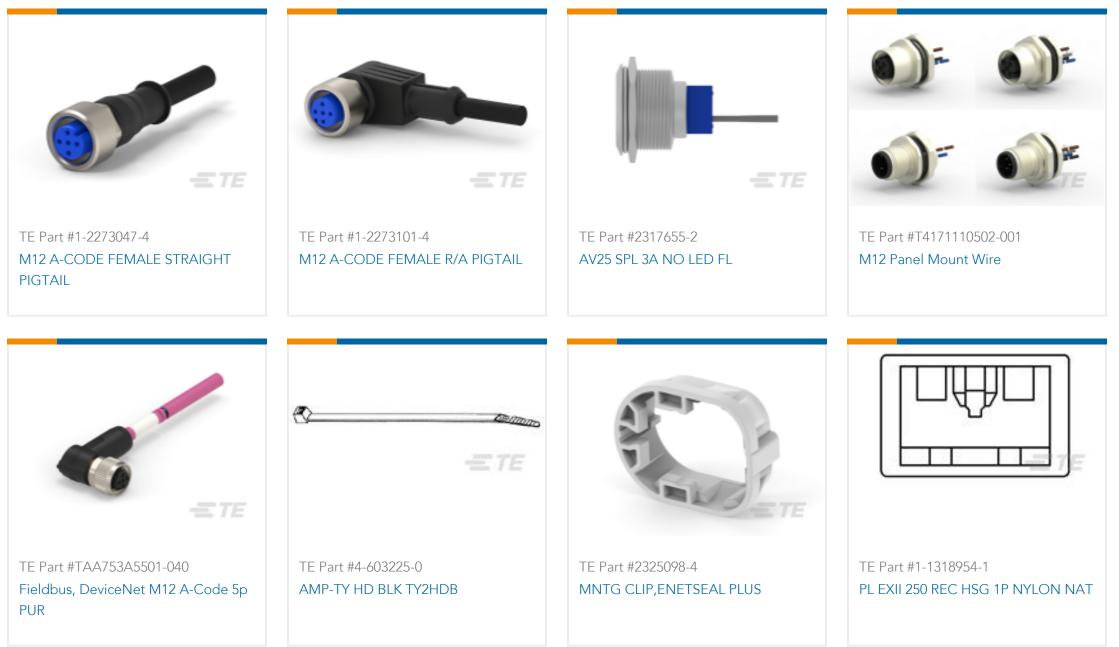

T4151210005-005

M8/M12 Cable Assemblies, Sensor/Actuator, 5 Positions, A M8/M12 Cable Assembly Keying, Plug, M12 Pigtail, Right Angle, Cable Assembly Length 5000 mm





Documents

Product Drawings RPC-M12-MR-5CON-PVC-5.0

English

CAD Files

3D PDF

3D

Customer View Model

ENG_CVM_CVM_T4151210005-005_A.2d_dxf.zip

English

Customer View Model

ENG_CVM_CVM_T4151210005-005_A.3d_igs.zip

English

Customer View Model

ENG_CVM_CVM_T4151210005-005_A.3d_stp.zip

English

By downloading the CAD file I accept and agree to the **Terms and Conditions** of use.

Datasheets & Catalog Pages M8 / M12 Connector System Catalog

English

Product Specifications Application Specification

English