


- Continuous short circuit protection
- I/O isolation: 1'060 VAC
- Operating temperature range  
-40 to +85 °C without derating
- Input voltage ranges ( $\pm 10\%$ ):  
3.3, 5, 12, 24 VDC
- High efficiency up to 82%
- SIP-4 package
- Unregulated outputs
- 3-year product warranty



The TBA 1 is an elementary 1 Watt DC/DC SIP converter series which is specifically designed to offer a low-cost solution with no concession on quality and lifetime. The new design improves on the industry standard features and offers an integrated continuous short circuit protection circuit, an operating temperature range from  $-40^{\circ}\text{C}$  to  $85^{\circ}\text{C}$  without derating and I/O-isolations of either 1'060 VAC. It offers a broad application range in any space and cost critical application.

Models				
Order Code	Input Voltage Range	Output Voltage nom.	Output Current max.	Efficiency typ.
TBA 1-0310	2.97 - 3.63 VDC (3.3 VDC nom.)	3.3 VDC	260 mA	73 %
TBA 1-0311		5 VDC	200 mA	76 %
TBA 1-0510	4.5 - 5.5 VDC (5 VDC nom.)	3.3 VDC	260 mA	75 %
TBA 1-0511		5 VDC	200 mA	79 %
TBA 1-0519		9 VDC	110 mA	80 %
TBA 1-0512		12 VDC	80 mA	82 %
TBA 1-0513		15 VDC	65 mA	82 %
TBA 1-1211	10.8 - 13.2 VDC (12 VDC nom.)	5 VDC	200 mA	79 %
TBA 1-1219		9 VDC	110 mA	79 %
TBA 1-1212		12 VDC	80 mA	80 %
TBA 1-1213		15 VDC	65 mA	80 %
TBA 1-2411	21.6 - 26.4 VDC (24 VDC nom.)	5 VDC	200 mA	79 %
TBA 1-2419		9 VDC	110 mA	80 %
TBA 1-2412		12 VDC	80 mA	82 %
TBA 1-2413		15 VDC	65 mA	82 %

### Input Specifications

Input Current	- At no load	3.3 Vin models: <b>30 mA typ.</b> 5 Vin models: <b>25 mA typ.</b> 12 Vin models: <b>15 mA typ.</b> 24 Vin models: <b>10 mA typ.</b>
Surge Voltage		3.3 Vin models: <b>5 VDC max.</b> (1 s max.) 5 Vin models: <b>9 VDC max.</b> (1 s max.) 12 Vin models: <b>18 VDC max.</b> (1 s max.) 24 Vin models: <b>30 VDC max.</b> (1 s max.)
Recommended Input Fuse		3.3 Vin models: <b>800 mA</b> (slow blow) 5 Vin models: <b>500 mA</b> (slow blow) 12 Vin models: <b>200 mA</b> (slow blow) 24 Vin models: <b>100 mA</b> (slow blow)
Input Filter		<b>Internal Capacitor</b> (external capacitor recommended)

### Output Specifications

Voltage Set Accuracy		<b>±3% max.</b> (at 60% for 5VDC models) <b>±3% max.</b> (at 80% for other models)
Regulation	- Input Variation (Vmin - Vmax) - Load Variation	<b>1.5% max.</b> (at 1% change of Vin) (see application note: <a href="http://www.tracopower.com/overview/tba1">www.tracopower.com/overview/tba1</a> )
Ripple and Noise	- 20 MHz Bandwidth	<b>200 mVp-p max.</b> <b>65 mVp-p typ.</b>
Capacitive Load		3.3 Vout models: <b>3'300 µF max.</b> 5 Vout models: <b>2'200 µF max.</b> 9 Vout models: <b>1'000 µF max.</b> 12 Vout models: <b>470 µF max.</b> 15 Vout models: <b>470 µF max.</b>
Minimum Load		<b>Not required</b>
Temperature Coefficient		<b>±0.02 %/K max.</b>
Start-up Time		<b>30 ms max.</b>
Short Circuit Protection		<b>Continuous, Automatic recovery</b>

### Safety Specifications

Safety Standards	- IT / Multimedia Equipment	<b>Designed for EN 60950-1</b> (no certification)
------------------	-----------------------------	---

### General Specifications

Relative Humidity		<b>95% max.</b> (non condensing)
Temperature Ranges	- Operating Temperature - Case Temperature - Storage Temperature	<b>-40°C to +95°C</b> <b>+105°C max.</b> <b>-55°C to +125°C</b>
Power Derating	- High Temperature	<b>5 %/K above 85°C</b>
Cooling System		<b>Natural convection</b> (20 LFM)
Switching Frequency		<b>50 - 200 kHz</b> (PWM)
Insulation System		<b>Functional Insulation</b>
Isolation Test Voltage	- Input to Output, 60 s	<b>1'060 VAC</b>
Isolation Resistance	- Input to Output, 500 VDC	<b>1'000 MOhm min.</b>
Isolation Capacitance	- Input to Output, 100 kHz, 1 V	<b>30 pF max.</b>
Reliability	- Calculated MTBF	<b>2'000'000 h</b> (MIL-HDBK-217F, ground benign)
Housing Material		<b>Plastic</b> (UL 94 V-0 rated)
Potting Material		<b>Epoxy</b> (UL 94 V-0 rated)
Pin Material		<b>Tinned Copper</b>
Connection Type		<b>THD</b> (Through-Hole Device)


All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Weight	1.6 g
Environmental Compliance - Reach	<a href="http://www.tracopower.com/info/reach-declaration.pdf">www.tracopower.com/info/reach-declaration.pdf</a>
- RoHS	<a href="http://www.tracopower.com/info/rohs-declaration.pdf">www.tracopower.com/info/rohs-declaration.pdf</a>

### Supporting Documents

Overview Link (for additional Documents)	<a href="http://www.tracopower.com/overview/tba1">www.tracopower.com/overview/tba1</a>
--	--

### Outline Dimensions

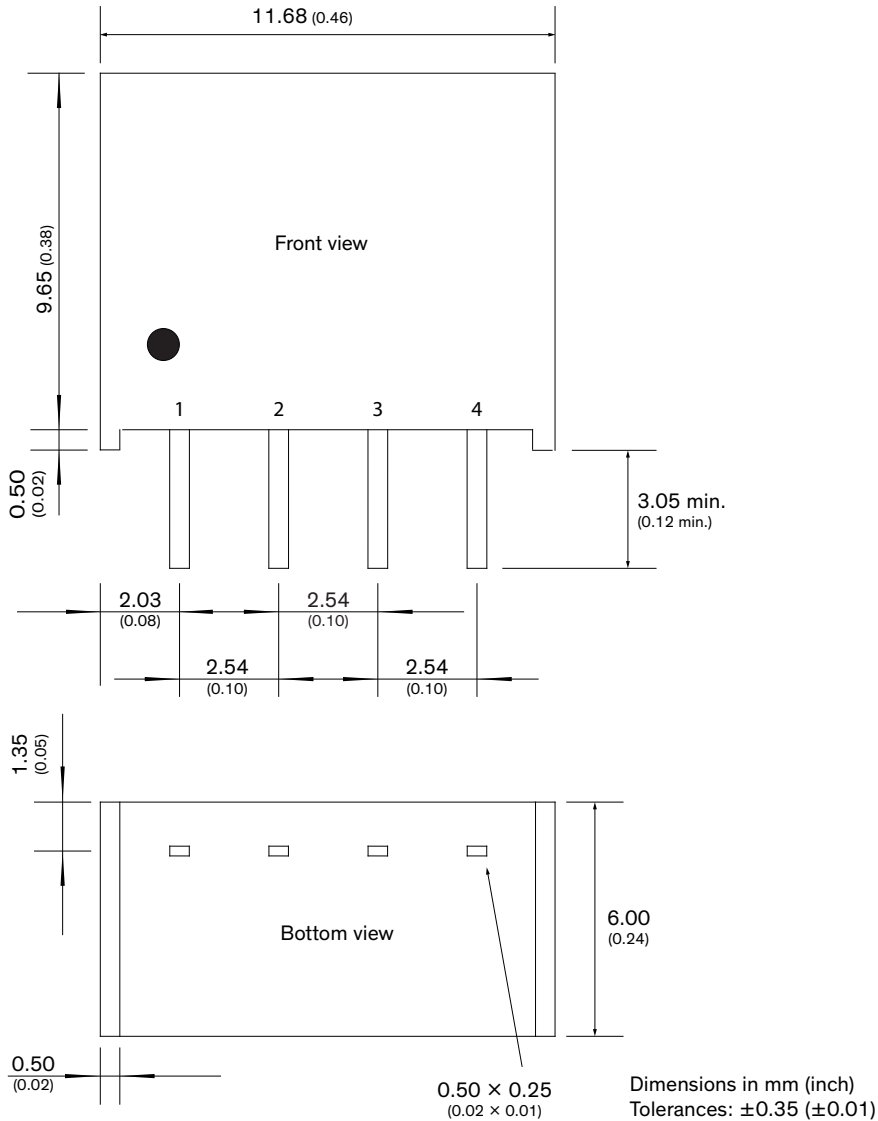

Pinout	
Pin	Function
1	-Vin (GND)
2	+Vin (Vcc)
3	-Vout
4	+Vout