


- 30 Watt open frame power supplies in a 3.34" x 1.36" package
- Compact and cost efficient design
- Peak power function up to 130%
- I/O reinforced isolation 3000 VAC
- Operating temperature range -40°C to $+85^{\circ}\text{C}$
- No load input power $<0.3\text{W}$ (acc. ErP directive)
- High efficiency up to 90%
- Internal EN 55032 class B filter
- Protection class II prepared
- 3 year product warranty

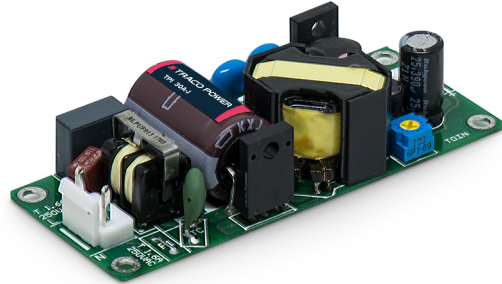

UL 62368-1 IEC 62368-1

The TPI 30A-J is a 30 Watt AC/DC open frame power supplies series with a 3000 VAC reinforced isolation system. Our TPI line specifically focuses on providing cost efficient industrial power supplies in compact designs. This series offers a peak power function which enables the unit to deliver up to 130% of the rated power for up to 10 seconds. Excellent efficiency of up to 90% allows a compact design and an operating temperature range (natural convection) of -40°C to $+60^{\circ}\text{C}$ without derating, while going up to $+85^{\circ}\text{C}$ with either load derating or forced cooling. They are designed to meet the ErP directive ($< 0.3\text{ W}$ no load power consumption) and come with an EMC characteristics dedicated for applications in industrial/automation and test & measurement fields. High reliability is provided by use of industrial high-quality grade components and an excellent thermal management. It makes the TPI 30A-J an ideal solution for any demanding industrial devices or space critical applications.

Models

Order Code	Output Power max.	Output Voltage nom. (adjustable)	Output Current max.	Output Current peak	Efficiency typ.
TPI 30-103A-JP	20 W	3.3 VDC (2.97 - 3.63 VDC)	6'000 mA	7'576 mA	83 %
TPI 30-105A-JP		5 VDC (4.0 - 5.5 VDC)	6'000 mA	8'000 mA	86 %
TPI 30-112A-JP	30 W	12 VDC (9.6 - 13.2 VDC)	2'500 mA	3'333 mA	89 %
TPI 30-115A-JP		15 VDC (12.0 - 16.5 VDC)	2'000 mA	2'667 mA	89 %
TPI 30-124A-JP		24 VDC (19.2 - 26.4 VDC)	1'250 mA	1'667 mA	88 %
TPI 30-136A-JP		36 VDC (28.8 - 39.6 VDC)	840 mA	1'111 mA	89 %
TPI 30-148A-JP		48 VDC (38.4 - 52.8 VDC)	630 mA	833 mA	91 %
TPI 30-153A-JP		53 VDC (42.4 - 58.3 VDC)	580 mA	755 mA	90 %

Input Specifications

Input Voltage	- AC Range	85 - 264 VAC (Full Range)
	- DC Range	120 - 370 VDC (Designed for, no certification)
Input Frequency		47 - 63 Hz
Input Current	- Full Load & Vin = 230 VAC	400 mA max.
	- Full Load & Vin = 115 VAC	800 mA max.
Power Consumption	- At no load	75 mW max. (Ready to meet ErP directive)
	- At no load	45 mW typ. (Ready to meet ErP directive)
Input Inrush Current	- At 230 VAC	45 A max.
	- At 115 VAC	26 A max.
Input Protection		T 1.6 A / 250 VAC (Internal Fuse in L)
Recommended Input Fuse		(The need of an external fuse has to be assessed in the final application.)

Output Specifications

Output Voltage Adjustment		±10% (3.3 VDC models) -20% to +10% (other models) (By trim potentiometer) Output power must not exceed rated power!
Voltage Set Accuracy		±1% max.
Regulation	- Input Variation (Vmin - Vmax)	0.2% max.
	- Load Variation (0 - 100%)	0.7% max. (3.3 and 5 VDC model) 0.5% max. (other output models)
Output Current peak		max. peak duration: 5 s with 20% duty cycle and 70% average operation power
Ripple and Noise (20 MHz Bandwidth)		50 mVp-p typ. 3.3 & 5 Vout models: w/ 10 µF, 25 V, MLCC 48 & 5.3 Vout models: w/ 0.1 µF, 100 V, MLCC other models: w/ 1 µF, 50 V, MLCC
Capacitive Load	3.3 VDC model:	10'000 µF max.
	5 VDC model:	12'000 µF max.
	12 VDC model:	2'085 µF max.
	15 VDC model:	1'350 µF max.
	24 VDC model:	520 µF max.
	36 VDC model:	235 µF max.
	48 VDC model:	130 µF max.
53 VDC model:	109 µF max.	
Minimum Load		Not required
Temperature Coefficient		±0.02 %/K max.
Hold-up Time	- At 230 VAC	80 ms min.
	- At 115 VAC	14 ms min.
Start-up Time	- At 230 VAC	800 ms max.
	- At 115 VAC	900 ms max.
Short Circuit Protection		Continuous, Automatic recovery
Output Current Limitation		165% typ. of Iout max.
Overvoltage Protection		125 - 140% of Vout nom.
Transient Response	- Response Deviation	3% max. (50% to 75% Load Step at 2.5 A/µs)
	- Response Time	500 µs typ. (50% to 75% Load Step at 2.5 A/µs)

Safety Specifications

Safety Standards	- IT / Multimedia Equipment	EN 62368-1 IEC 62368-1 UL 62368-1
	- Certification Documents	www.tracopower.com/overview/tpi30a-j

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Protection Class	Class I (Prepared): Connection to PE Class II (Prepared): Reinforced Insulation
Pollution Degree	PD 2
Over Voltage Category	OVC II

EMC Specifications

EMI Emissions	- Conducted Emissions	EN 55032 class B (internal filter) FCC Part 15 class B (internal filter)
	- Radiated Emissions	EN 55032 class B (internal filter) FCC Part 15 class B (internal filter)
	- Harmonic Current Emissions	EN 61000-3-2, class A
	- Voltage Fluctuations & Flicker	EN 61000-3-3
EMS Immunity	- Electrostatic Discharge	EN 55024 (IT Equipment) Air: EN 61000-4-2, ±15 kV, perf. criteria A Contact: EN 61000-4-2, ±8 kV, perf. criteria A
	- RF Electromagnetic Field	EN 61000-4-3, 20 V/m, perf. criteria A
	- EFT (Burst) / Surge	EN 61000-4-4, ±2 kV, perf. criteria A
	- Conducted RF Disturbances	L to L: EN 61000-4-5, ±1 kV, perf. criteria A EN 61000-4-6, 20 Vrms, perf. criteria A
	- PF Magnetic Field	Continuous: EN 61000-4-8, 30 A/m, perf. criteria A
	- Voltage Dips & Interruptions	230 VAC / 50 Hz: EN 61000-4-11 115 VAC / 60 Hz: EN 61000-4-11

General Specifications


Relative Humidity	95% max. (non condensing)	
Temperature Ranges	- Operating Temperature	-40°C to +85°C
	- Storage Temperature	-40°C to +85°C
Power Derating	- High Temperature	2.2 %/K above 60°C
	- Low Input Voltage	4 %/V below 90 VAC
Cooling System	Natural convection (20 LFM)	
Altitude During Operation	5'000 m max.	
Switching Frequency		30 - 60 kHz
		45 kHz typ.
Insulation System	Reinforced Insulation	
Isolation Test Voltage	- Input to Output, 60 s	4'000 VDC
	- Input to Case or PE, 60 s	2'500 VDC
Isolation Resistance	- Input to Output, 500 VDC	100 MΩ min.
Leakage Current (at 264 VAC)	- Touch Current	100 μA max.
Reliability	- Calculated MTBF	3'340'000 h (MIL-HDBK-217F, ground benign)
Environment	- Vibration	IEC 60068-2-6
	- Mechanical Shock	IEC 60068-2-27
Connection Type	JST	
Weight	60.5 g	
Environmental Compliance	- Reach	www.tracopower.com/info/reach-declaration.pdf
	- RoHS	www.tracopower.com/info/rohs-declaration.pdf

Supporting Documents

Overview Link (for additional Documents)	www.tracopower.com/overview/tpi30a-j
--	--

All specifications valid at nominal voltage, full load and +25°C after warm-up time unless otherwise stated.

Outline Dimensions

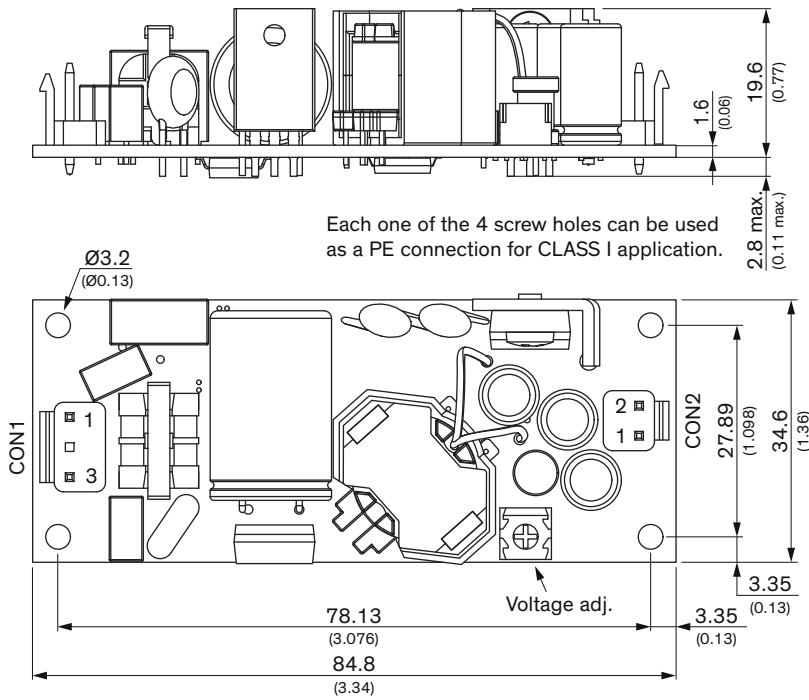

Dimensions in mm (inch)
 Tolerances: x.x ± 0.5 (x.xx ± 0.02)
 Tolerances: x.xx ± 0.25 (x.xxx ± 0.01)
 Screw lock torque: Max. 0.49 Nm (5 kgfcm)

Pin connectors

Input (CON1)		Output (CON2)	
Pin	Function	Pin	Function
1	Line	1	+Vout
3	Neutral	2	-Vout

Input: JST series
 mates with JST crimp terminal: SVH-21T-P1.1
 and terminal housing: VHR-3N

Output: JST series
 mates with JST crimp terminal: SVH-21T-P1.1
 and terminal housing: VHR-2N