


PRELIMINARY SPEC

Features

- LONG LIFE, SOLID STATE.
- WITH BUILT-IN RESISTOR FOR 28VDC APPLICATION.
- WEDGE BASE, EASY INSTALLATION & REPLACEMENT.
- UL RATING : 94V-0.
- HOUSING MATERIAL: TYPE 66 NYLON.
- 5V INTERNAL RESISTOR.
- RoHS COMPLIANT.

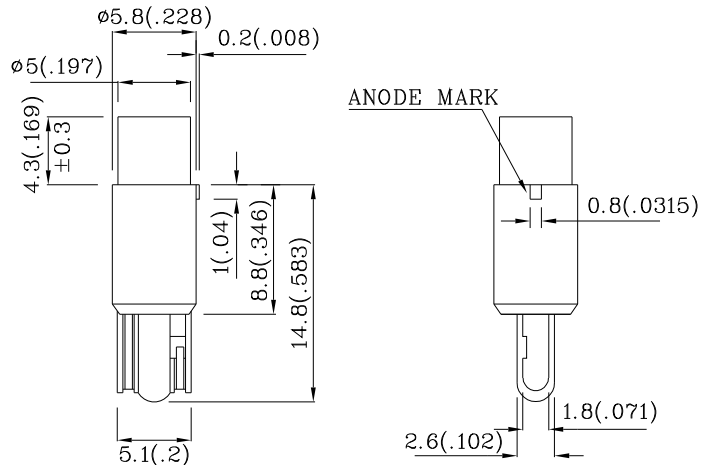


Notes:

1. All dimensions are in millimeters (inches).
2. Tolerance is $\pm 0.25(0.01)$ " unless otherwise noted.





Absolute Maximum Ratings (TA=25°C)		SGK (InGaAlP)	Unit
Reverse Voltage	VR	5	V
Forward Current	VF	6	V
Power Dissipation	PT	85	mW
Operating Temperature	TA	-40 ~ +70	°C
Storage Temperature	Tstg	-40 ~ +85	
Lead Solder Temperature [2mm Below Package Base]	260°C For 3 Seconds		
Lead Solder Temperature [5mm Below Package Base]	260°C For 5 Seconds		

Operating Characteristics (TA=25°C)		SGK (InGaAlP)	Unit
Forward Current (Typ.) (VF=5V)	IF	11.5	mA
Forward Current (Max.) (VF=5V)	IF	17.5	mA
Reverse Current (Max.) (VR=5V)	IR	10	uA
Wavelength of Peak Emission (Typ.) (VF=5V)	λP	574	nm
Wavelength of Dominant Emission (Typ.) (VF=5V)	λD	570	nm
Spectral Line Full Width At Half-Maximum (Typ.) (VF=5V)	$\Delta\lambda$	20	nm


Part Number	Emitting Color	Emitting Material	Lens-color	Luminous Intensity (V=5V) mcd		Wavelength nm λP	Viewing Angle $2\theta 1/2$
				min.	typ.		
XNZSSGK52W5V02	Green	InGaAlP	Water Clear	12	59	574	70°
Published Date : JUN 07, 2006 Drawing No : XDSA9763 V1 Checked : B.L.LIU P.1/3							

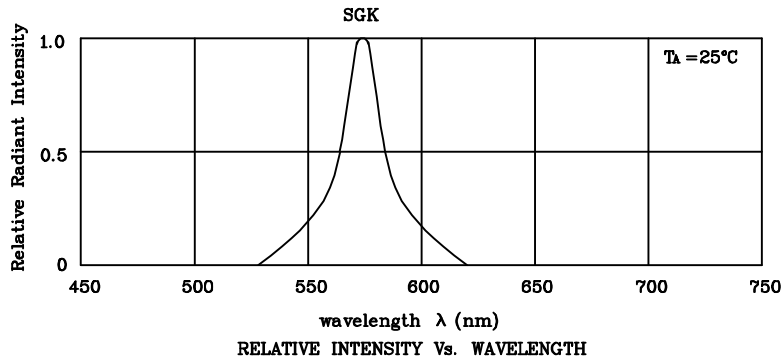

❖ SGK

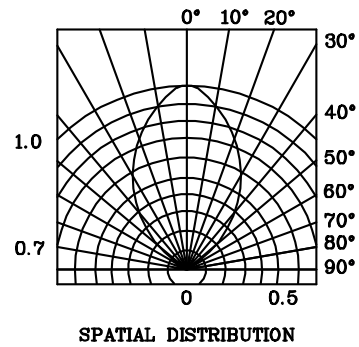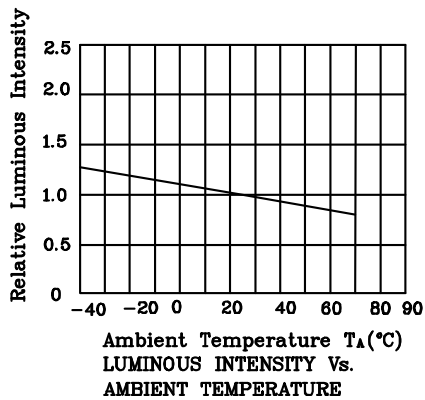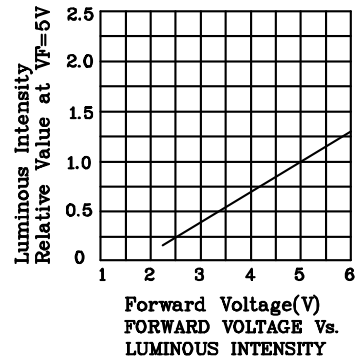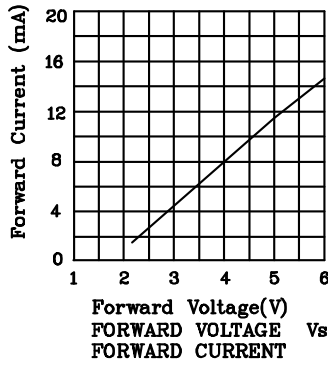

Wave Soldering Profile For Lead-free Through-hole LED.

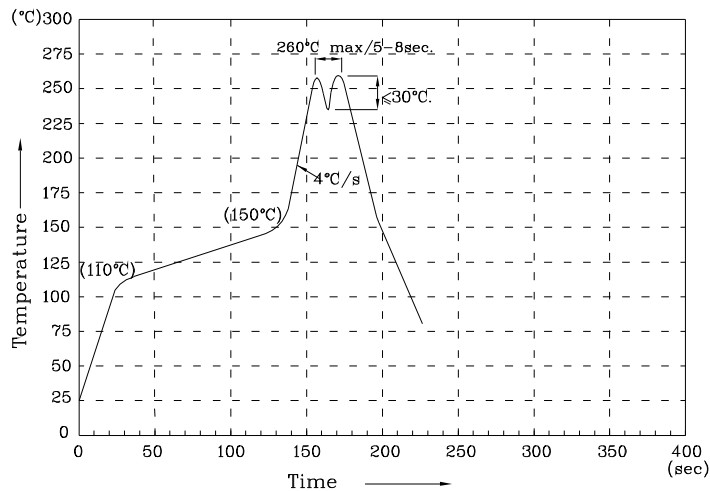

NOTES:

- 1.Recommend the wave temperature 245°C~260°C.The maximum soldering temperature should be less than 260°C.
- 2.Do not apply stress on epoxy resins when temperature is over 85 degree°C.
- 3.The soldering profile apply to the lead free soldering (Sn/Cu/Ag alloy).
- 4.No more than once.

Remarks:

If special sorting is required (e.g. binning based on Luminous intensity / luminous flux, or wavelength), the typical accuracy of the sorting process is as follows:

1. Wavelength: +/-1nm
2. Luminous Intensity / Luminous Flux: +/-15%

Note: Accuracy may depend on the sorting parameters.